

LIEBHERR

Quality

Quality standards

Liebherr domestic appliances are produced under the highest international quality standard – ISO 9001 and are compliant with the international environmental management standard – ISO 14001.

Tested quality

So that you can rely on your refrigeration appliance 24 hours a day, 365 days a year, we test every component for its long-term reliability, right from the design stage. For example, before a component such as a door hinge finds its way into production, it will first have to undergo 100,000 opening /closing cycles, which corresponds to more than 15 years of use.

Proven quality

Before packaging, every single appliance goes through a comprehensive quality inspection. This procedure tests all refrigeration technology, and all mechanical and electronic components. In addition, a visual inspection to confirm quality of workmanship also takes place.

VCC compressor

Modern speed-controlled VCC compressors deliver perfect refrigeration performance and ensure that appliances benefit from optimum energy efficiency and cost effectiveness. They operate extremely quietly.



Design

Practical design for daily use

At Liebherr, design and functionality go hand-in-hand. For example: to prevent finger marks on our stainless steel doors, selected models are finished with a SmartSteel surface; and, to make door opening easy and convenient, our ergonomically designed handles house an integrated opening mechanism; not to mention that all GlassLine shelves are dishwasher safe.

Lighting design

Liebherr's fridges and freezers are fitted with modern LED lighting. Upon opening the appliance door, the interior becomes evenly illuminated. LEDs are long-life, energy efficient and generate hardly any heat. We take meticulous care to install specially selected LEDs in order to achieve a harmonious, slightly bluish tinted lighting effect.

Award-winning design

The superb design-quality of our appliances has seen them honoured with many prestigious, international design awards from the likes of Plus X Award, reddot, iF product design and Good Design.



Innovation

Innovative ideas

Liebherr integrates style, function and technology:
BioFresh, SuperCool and SuperFrost are just a few
examples of performance features that contribute
to better food preservation. Accurate and independent
temperature control of the fridge and freezer
compartments is facilitated by DuoCooling: two
separately adjustable cooling circuits. There is no air
exchange between the fridge and freezer
compartment, so that odours cannot be transferred
and the stored food is prevented from drying out.

ActiveGreen initiative

A concept that best represents Liebherr's commitment to finding greener ways to produce quality, sustainable products. Liebherr was the first refrigeration manufacturer to be RoHS compliant worldwide by restricting the use of hazardous substances. Energy efficiency is at the core of our ActiveGreen commitment, which is reflected in every aspect of our design and manufacturing process.

Energy efficiency

Liebherr refrigerators and freezers help to produce less energy waste and greenhouse gas emissions with the aim to have the least damaging effect on the environment and offering solutions that help consumers conserve energy.





Experience Super Freshness with BioFresh

Keeping your food fresh in a Liebherr is easy. BioFresh guarantees the perfect climate for super-long-term freshness. Through its advanced technology the temperature is kept at just above freezing.

Each drawer can be used individually and provides ideal humidity. The **DrySafe** drawer with low humidity is ideal for storing meat, fish and dairy products, while fruits and vegetables are best kept in the high humidity **HydroSafe** or **Fruit & Vegetable-Safe** (optional). The natural loss of moisture in fruit and vegetables is

The natural loss of moisture in fruit and vegetables is significantly reduced. It's simple: fresh is better.









Lettuce + 8 days











Raspberries + 2 days





Asparagus + 8 days





Meat + 6 days





The Liebherr BioFresh App



biofresh.liebherr.com

It provides the ultimate tool for all health conscious food lovers to easily access valuable information regarding food storage, vitamins, minerals and shelf life.

The information relates to storage in a BioFresh drawer compared to a conventional fridge.



Contents



Freestanding Side by Side

SBSes 8486	page 10
SBSes 8484	page 12
SBSes 8474	page 12
SBSes 8683	page 14
SBSes 8673	page 16
SBSbs 8673	page 18
SBSes 7253	page 20
SBSef 7242	page 22



Freestanding Fridge-Freezer

CNef 4315	page 24
CNPef 4516	page 26
CNPef 4416	nage 26



Integrated French Door

ECBN 6256 page 30



Integrated Bottom Mount

ECBN 6156 page 32 ECBN 5066 page 32



Integrated All Fridge & All Freezer

SIKB 3550 page 34 page 34



Integrated Fridge-Freezer

 SICBN 3366
 page 36

 SICBN 3356
 page 36

 SICN 3366
 page 38

 SICN 3356
 page 38



Integrated Underbench

SUIKo 1550 page 40 SUIK 1510 page 42 SUIG 1514 page 42



Built-In Wine Cellars & Beverage Centre

EWTdf 3553 page 46
UWTes 1672 page 48
UWKes 1752 page 50



Features of Liebherr Freestanding Appliances



SmartSteel: Available on select freestanding models it significantly reduces the visibility of fingerprints and is very easy to clean and scratch resistant. All that is required to maintain this beautiful exterior is the wipe of a clean dry or damp cloth.



BioFresh: BioFresh drawers provide customisable interplay of temperature and humidity controls. The DrySafe drawer with low humidity is ideal for storing meat, fish and dairy products, while fruits and vegetables are best kept in the high humidity HydroSafe.



SoftSystem: Automatic self-closing doors from 45 degrees eliminates slamming even when fully loaded.





SuperCool and SuperFrost: Reduces the temperature of the fridge and freezer respectively to assist with food preservation.



VarioSpace: Nearly all freezers include drawers and glass shelves that can be conveniently removed to create extra storage space. It's Liebherr's very practical solution to quickly accommodate even bulky items.



Integrated bottle shelf: The versatile glass/bottle shelf can be interchanged depending on your personal preference. Utilise the glass layer for additional shelf storage or simply move the glass plate beneath to access the bottle rack to chill and store beverages instead.

The features shown are model dependent; the description applies to the relevant model.













It doesn't get any fresher

Premium quality characterises the SBSes 8683 Side-by-Side fridge-freezer from the BluPerformance series. High-quality components and materials, and perfect workmanship combined with precise touch electronics and digital temperature display, make the Side-by-Side a very efficient household appliance. Fruit, vegetables, fish, meat and dairy products keep for much longer thanks to BioFresh technology. With the adjustable temperature range of 0 °C and -2 °C, BioFresh-Plus offers even more flexibility. The BioFresh-Plus safe includes a versatile Fish & Seafood-Safe. The NoFrost technology means that the appliance never has to be defrosted. Its elegant and classic design with a SmartSteel surface ensures that the Side-by-Side appliance will remain a household highlight for years to come.

BLU Performance













SBSes 8683 is made up of two individual appliances SGNPes 4365 & SKBes 4360.








SKBes 4360



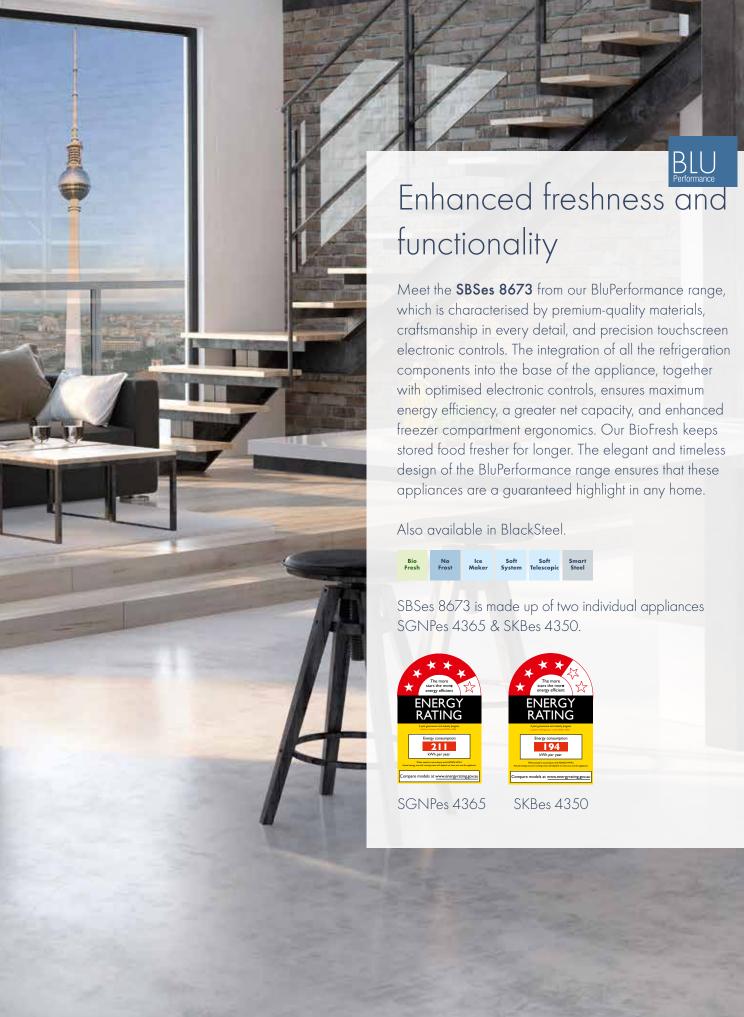







An optical highlight in BlackSteel

Our **SBSbs 8673** BlackSteel is a unique black stainless steel which offers a new age hi-tech appeal while still retaining a timeless elegance. Finished with a modern industrial style aluminium door handle, with integrated door opening mechanism for convenient and minimal effort, BlackSteel will complement other stainless steel appliances which feature in many homes of this generation. Our BioFresh drawer temperatures are maintained at just above 0°C in conjunction with adjustable humidity means food stays fresher for longer.

Also available in Stainless Steel.







Soft Syster

oft Sof tem Telesco Smart Steel Black Steel

SBSbs 8673 is made up of two individual appliances SGNPbs 4365 & SKBbs 4350.




SGNPbs 4365




SKBbs 4350



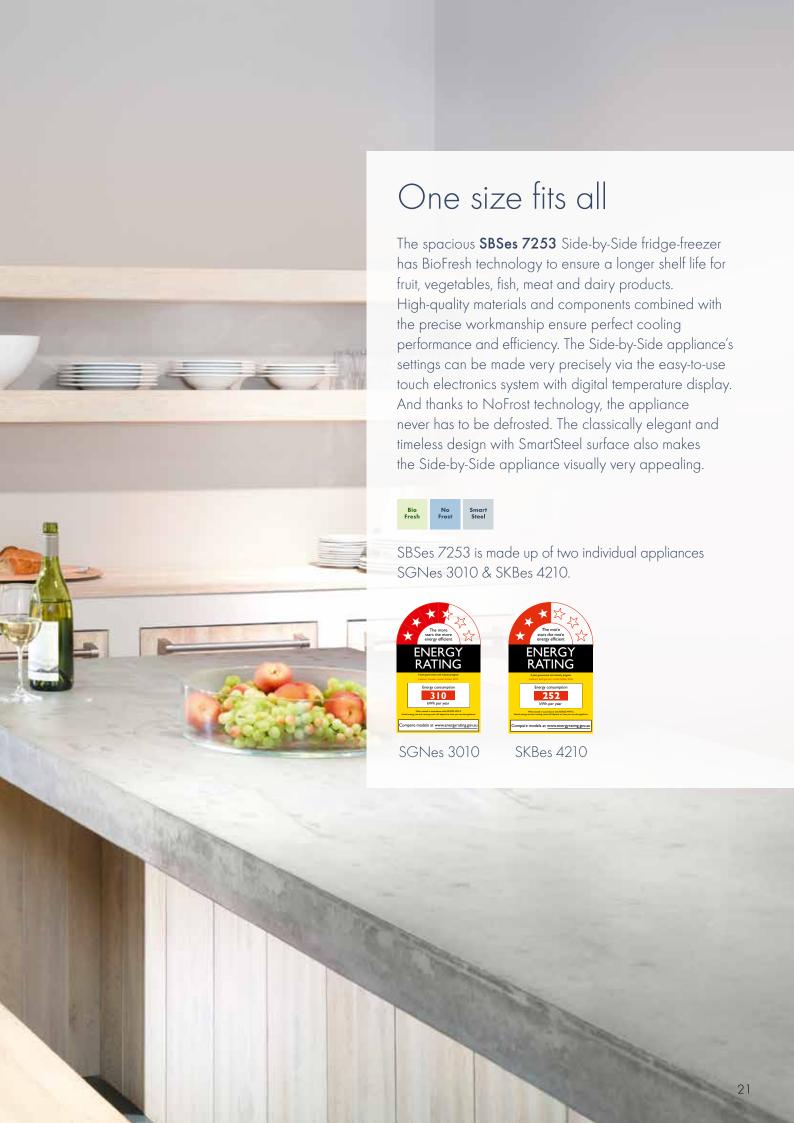



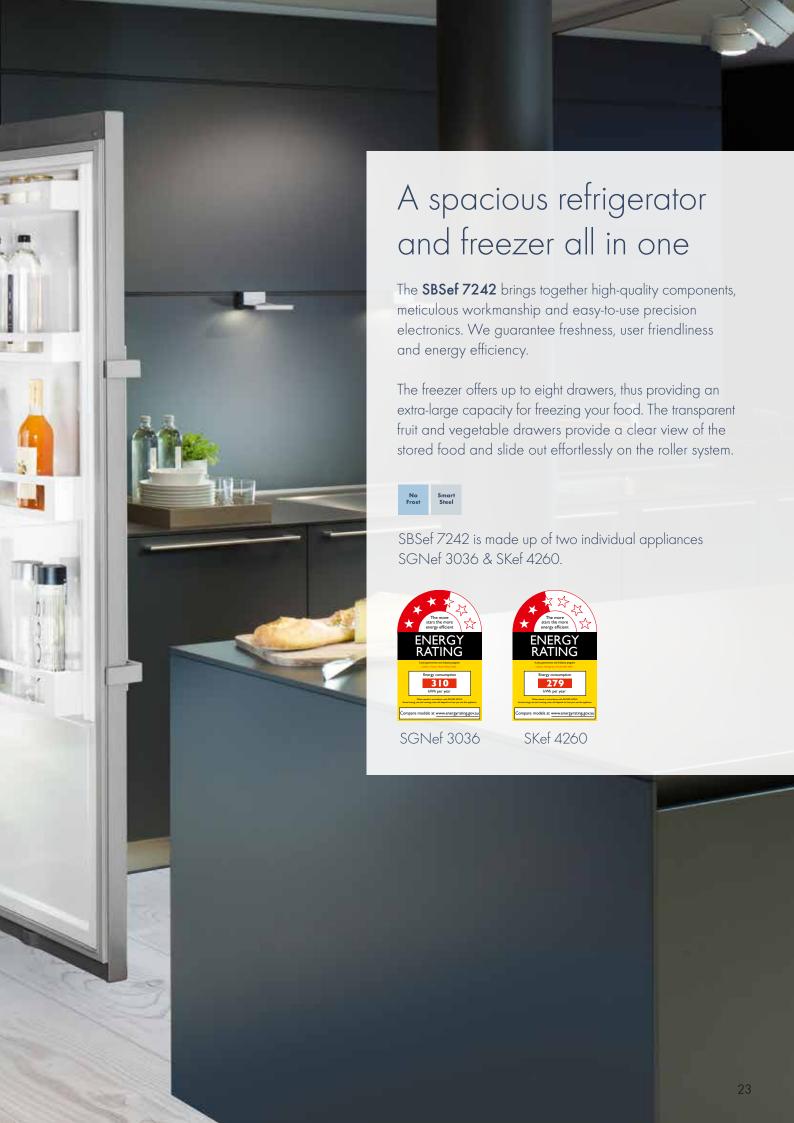



Energy efficiency at its best

The new BluPerformance **CNef 4315** is characterised by premium-quality materials, craftsmanship in every detail, and precision touchscreen electronic controls.

The integration of all the refrigeration components into the base of the appliance, together with optimised electronic controls, ensures maximum energy efficiency, a greater net capacity, and enhanced freezer compartment ergonomics. BioCool technology keeps stored food fresher for longer.

The elegant and timeless design of the BluPerformance CNef 4315 ensures that these appliances are a guaranteed highlight in any home and that they will satisfy for many years to come.












CNef 4315







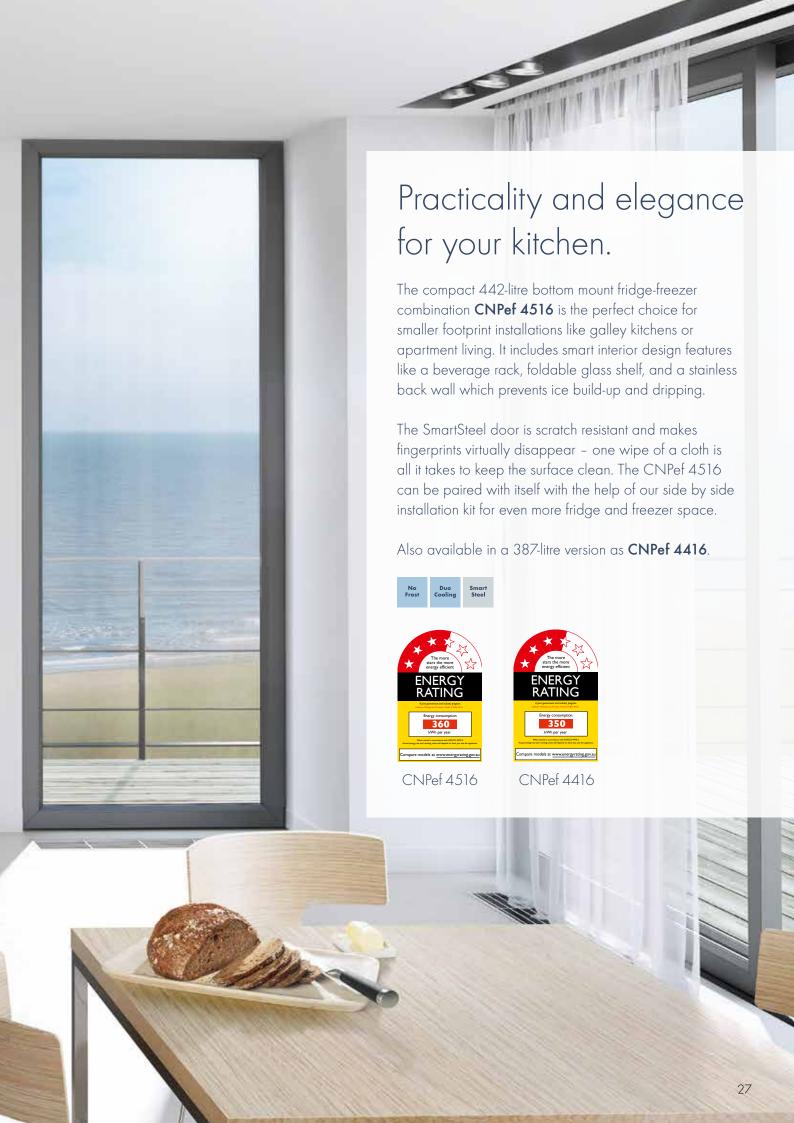



Features of Liebherr Integrated Appliances



Door-on-door technology: Allows custom panels to be affixed directly onto the appliance door so that the hinges are concealed, plus the cabinet and the fridge open as one, ensuring a wide range of design options and easy installation.



IceMaker: Liebherr's automatic IceMaker produces flawless crescent ice and keeps a constant supply on hand for every occasion. An activated charcoal filter ensures pure water for production of clear ice crescents.



Touch control system: Our intuitive electronic touch control panel (found on most models) ensures all functions are easy and convenient to use as well as guarantees that the settings selected remain accurate and constant.



SoftTelescopic: BioFresh with SoftTelescopic — a highly practical self-retracting, self-closing feature — makes daily use convenient and secure. The drawers are fully extendible and removable from a door opening angle of 90°.




Light columns: For Liebherr's PremiumPlus appliances as well as for Premium appliances with BioFresh, unique LED light columns are integrated into both sides of the compartment liner. Inside the columns are numerous LED lights that ensure uniform lighting throughout the interior.


The features shown are model dependent; the description applies to the relevant model.



BioFresh: BioFresh guarantees the perfect temperature and ideal humidity for much longer freshness. While the DrySafe is perfect for meat, fish, and dairy products, the high humidity in the Fruit & Vegetable-Safe can prevent fruit and vegetables from drying out and helps preserve stored goods for an even longer period.



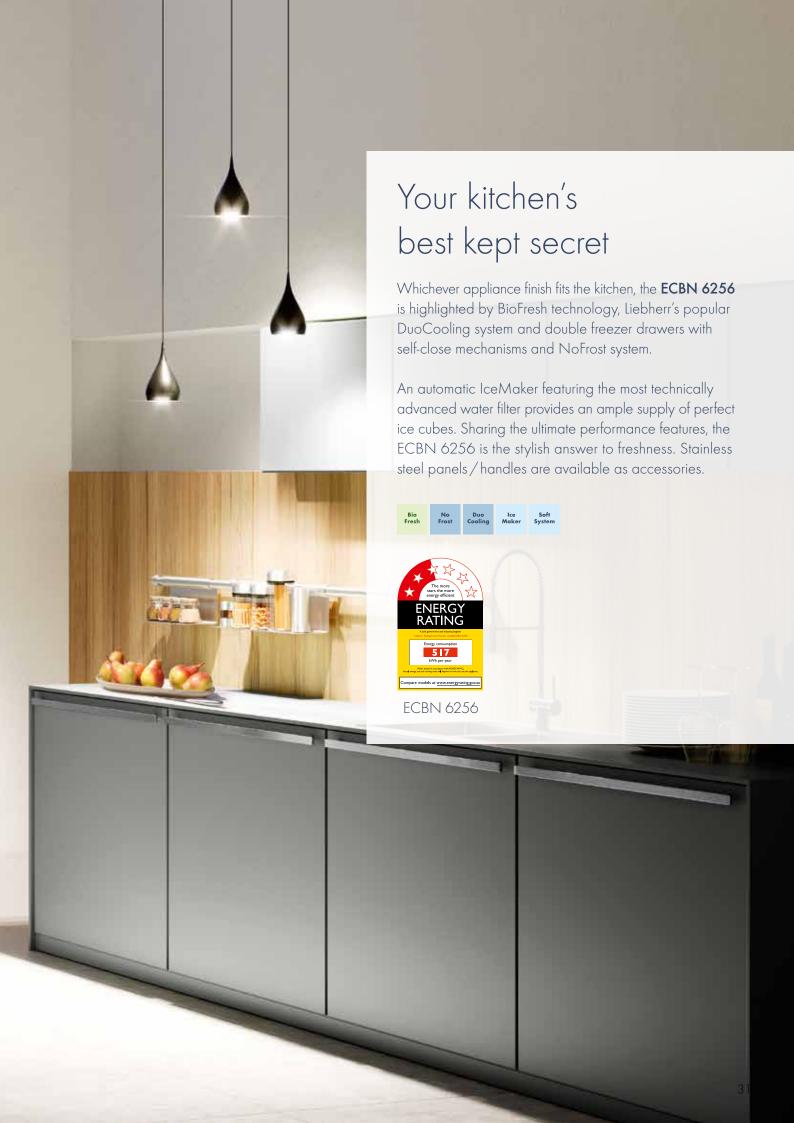

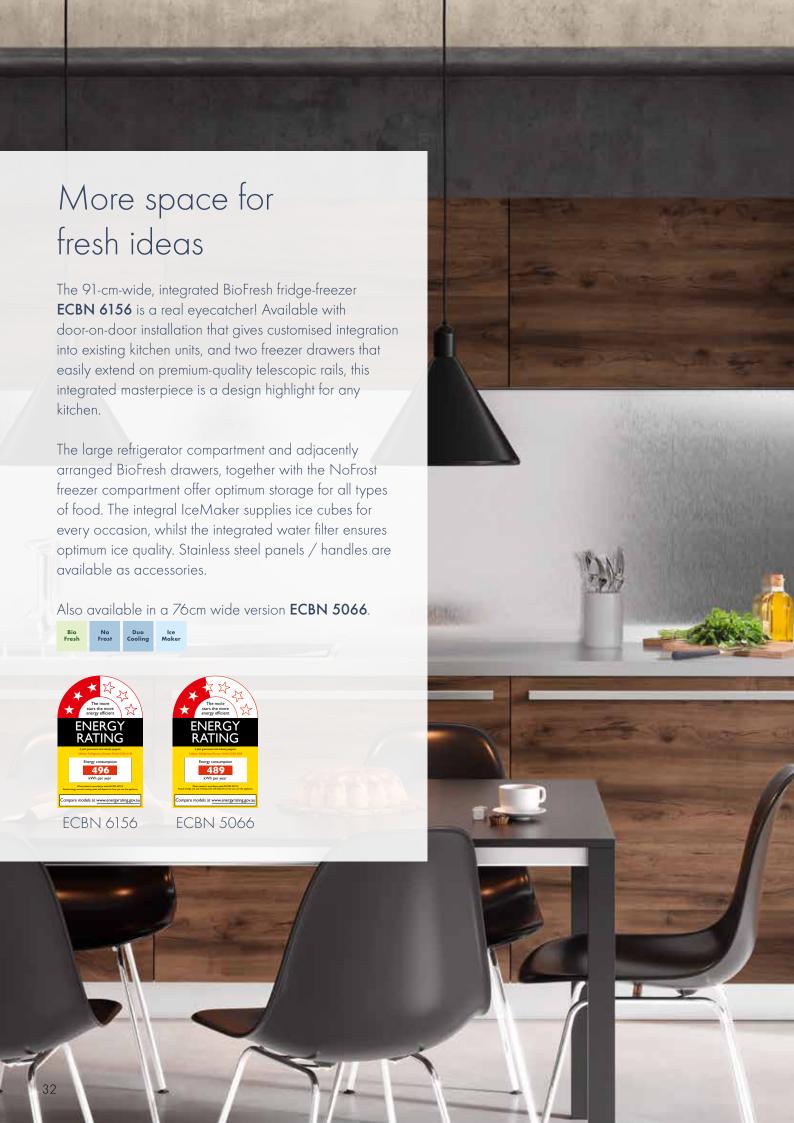











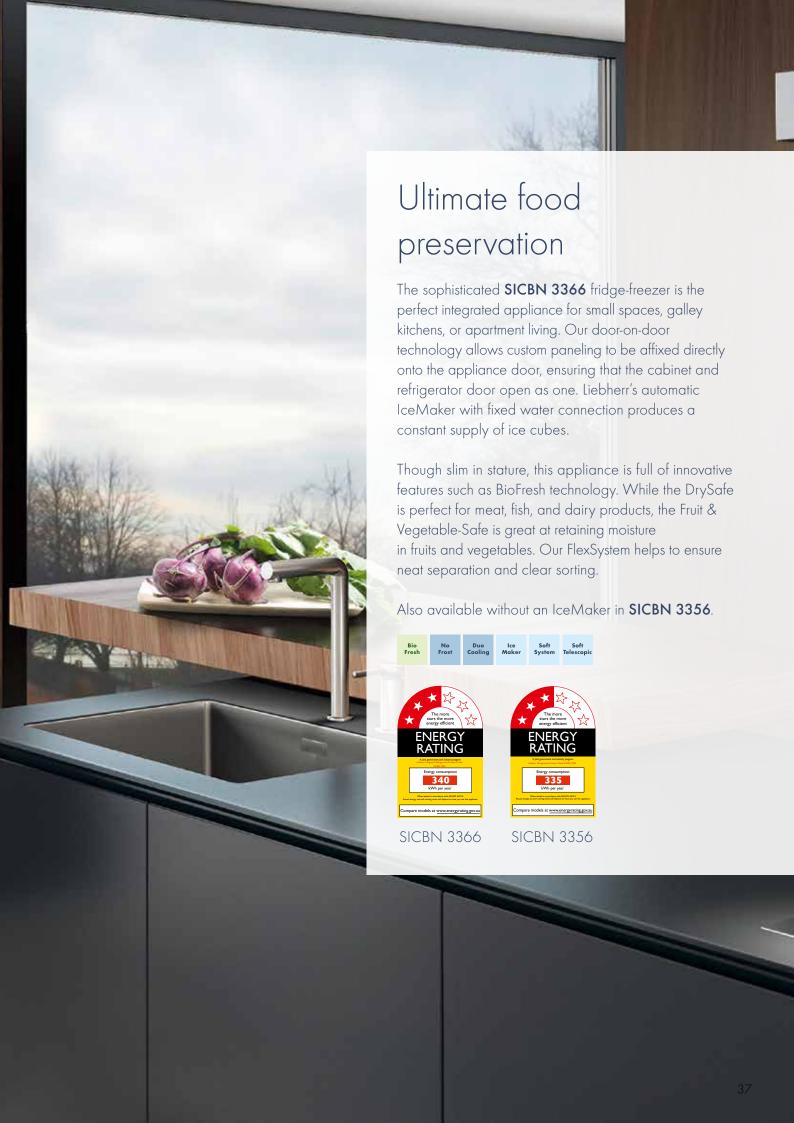

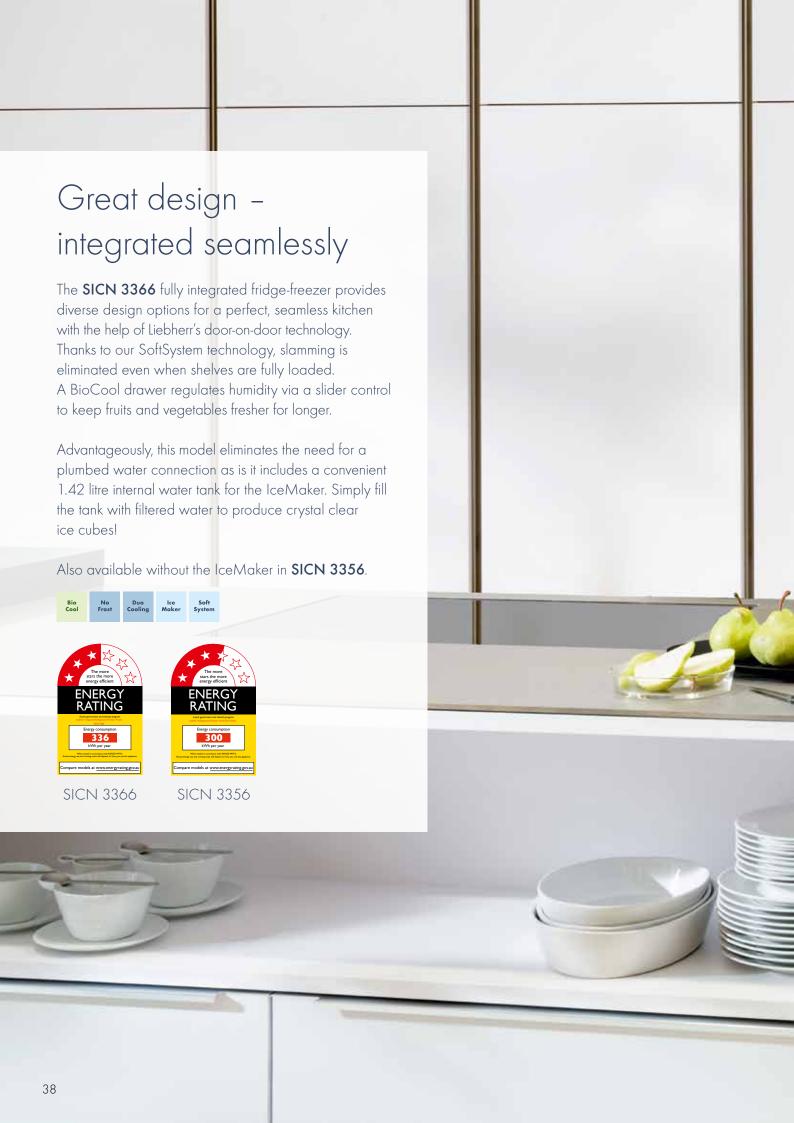



The smooth operator

The precision control system of the **SUIKo 1550** creates a stunning visual impact. This precision electronic control system enhances the ease and convenience of use. The SuperCool function quickly reduces the temperature of the fridge compartment; ideal for rapidly cooling down freshly stored food. Food can be stored safely with easy access on the pull-out glass shelves.

Practical rails can be used to divide the glass shelves according to package size. The innovative LED light creates first class interior illumination while the special satin finish of the light cover produces a pleasant lighting atmosphere. The pull-out fridge compartment is mounted on telescopic rails with soft stop. It has a practical bottle shelf and a large fruit and vegetable compartment. The large compartment can also be divided into two equal-sized compartments, with further storage space underneath. Stainless steel panel / handle are available as accessories.

Soft Telescopic



SUIKo 1550



Convenience at your fingertips

Liebherr's space-saving and efficient undercounter appliances are the practical choice for compact living spaces or couples. The **SUIK 1510** undercounter fridge is great for your fresh produce. Our innovative SoftSystem technology ensures that the appliance door closes gently even when it is fully loaded. What's more, the door closes automatically from an opening angle of approximately 30°. Airflow in this unit enters and exits from the front at plinth level, hence no ventilation grill is required in the worktop. Heights of the glass shelves are adjustable to accommodate large items for added flexibility.



And for frozen goods, the **SUIG 1514** undercounter freezer will be perfect. SmartFrost technology allows food to freeze faster and reduces ice build-up, making defrosting simpler and quicker. Similarly, SoftSytem allows soft closing to provide convenience and safety. No ventilation grill is needed in the worktop as airflow enters and exits from the front of this appliance.



Soft System

The SUIK 1510 undercounter fridge and SUIG 1514 undercounter freezer are perfect companions for each other! Best suited for small families who can now bid farewell to space wastage. Stainless steel panel / handle are available as accessories.





SUIG 1514

SUIK 1510







Features of Liebherr Wine Cabinets



LED lighting: The light in the wine cooling compartments can be dimmed to give a pleasing ambient light inside the appliance.



Presentation shelf: The practical shelf of the Vinidor models fulfills both bottle storage and presentation functions. The bottles can be stored horizontally at the rear.



Activated charcoal filter: Liebherr wine cabinets have a permanent supply of odourless, fresh air via an easily exchangeable activated charcoal filter.



Integrated lock: Nicely concealed into the door, this sturdy lock protects your fine wine collection.



Electronic LCD display: Intuitive navigation of touch electronic control system enables tailored storage options. The digital temperature display can be viewed via the UV tinted glass door.



Compressors: Specially developed compressors installed in the wine cabinets from Liebherr ensure that the wines are stored in a particularly low vibration environment.

The features shown are model dependent; the description applies to the relevant model.

Integrated solution for all your favourites

The advanced dual-zone **EWTdf 3553** offers a number of innovative solutions for wine storage. Controls are integrated into the insulation layer between the temperature zones, making it possible to set two different temperatures within the unit. Store red and white wines according to your preference — use the entire cabinet for one or store both, each at its optimum drinking temperature.

High-quality, easy-to-fit optional stainless steel accessory frame kit enables the model's integration into any kitchen. The robust stainless steel handle is easy to attach and makes opening of the door effortless.

This wine cabinet is compatible with furniture overlay panels (supplied by your kitchen retailer) or Liebherr's stainless steel overlay which is available as an accessory.














EWTdf 3553

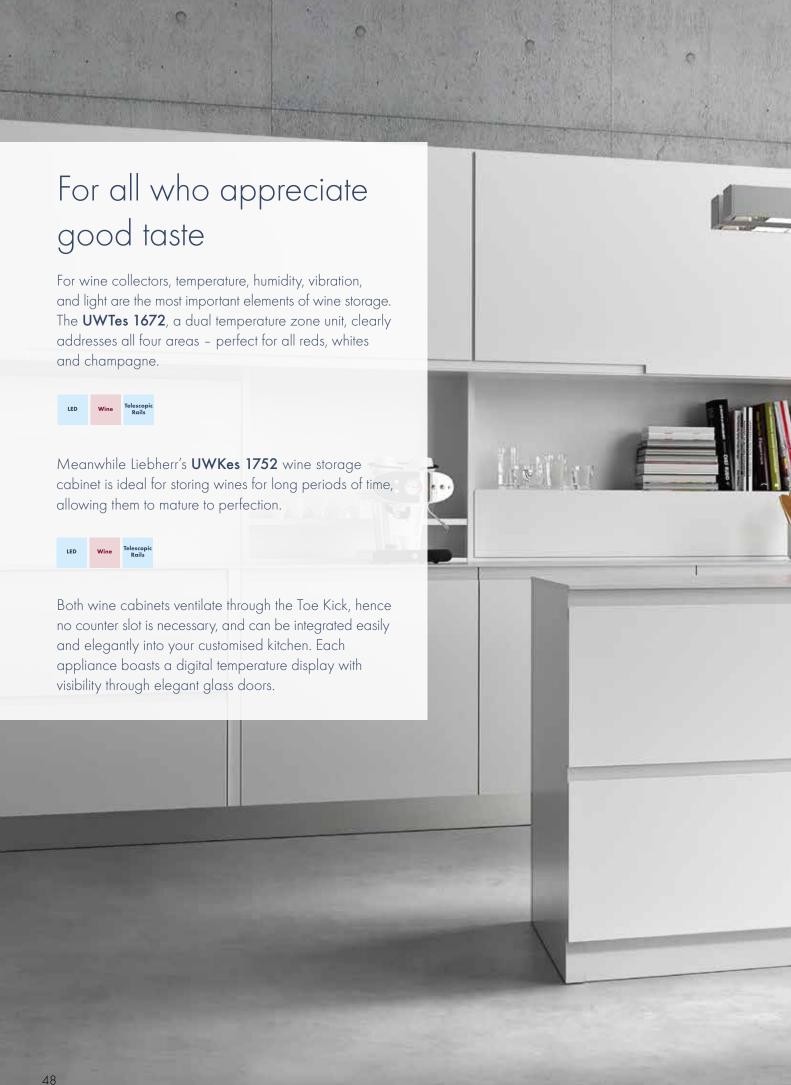





With a temperature range of 2°C to 20°C, the MEPS rated **UKes 1752** glass door beverage centre offers the perfect storage solution for your food and beverages. Installed under the bench top, the double-glazed glass door beverage centre, framed in stainless steel, allows you to store food and beverages at their optimal temperature. The tinted safety glass door ensures unwanted, harmful UV rays are filtered, whilst a key lock deters unwanted entry.

The MagicEye controls and internal LED temperature display means that you can easily adjust the temperature according to your requirements - from soft drink, to beer, juice or even any food type - the temperature is precise. An internal light also makes it easy to locate your favourite items from within. There are multiple storage options including two glass shelves, of which one is divisible for tall items, one pull-out grid shelf on telescopic rails for easy access to rear items and a base shelf.







UKes 1752

UKes 1752





*Side-by-Sides comprised of two models
Energy consumption (kWh/yr) I Star rating
Compressors
Total capacity litres (L) - Gross I Net
Refrigerator gross (L) I Refrigerator net (L)
Freezer gross (L) I Freezer net (L)
BioFresh gross (L) I BioFresh net (L)
Wine Zone gross (L) I Wine Zone net (L)
Control system and display Child proof
Lighting : PremiumPlus LED
Sabbath mode
DuoCooling
SoftSystem hinge - assists closure
Alarms : Door open I Temperature
BioFreshPlus drawers on telescopic rails
BioFresh drawers on telescopic rails
Fruit & vegetable drawer on telescopic rails
SuperCool VarioSafe
SuperFrost VarioSpace
Integrated bottle shelf
Freezer drawers I Ice cube drawer
IceMaker I Ice cube capacity (kg/24h)
Stainless steel door with SmartSteel
Stainless steel walls with SmartSteel
Default hinge
Voltage (V) Rated Current (A)
Made in
Installation Diagram
Millimetres (mm)
¹ Includes 15mm wall spacer fitted
Please note:
Wall spacers provided with the appliance must be used.
If the wall spacers are not used, the appliance will remain fully
functional but will have a slightly higher energy consumption level.
Cavity clearance for freestanding units allow minimum 50mm
above the unit if there is no ventilation cut-out.

SBSes 8486 PremiumPlus		SBSes 8484 PremiumPlus	
Bio Fresh- Plus No Ice Win Frost Maker Win	e Soft Soft Smart System Telescopic Steel	Bio No Ice Soft Fresh- Plus Frost Maker System	Soft Smart n Telescopic Steel
OWTN 4005	01/0 4000	CDN as 40CF	CI/Dec 4000
SWTNes 4265	SKBes 4360	SBNes 4265	SKBes 4360
211 5.0	194 4.0	204 5.5	194 4.0
1	1	1	1
327 279	413 366	345 298	413 366
- -	250 234	- -	250 234
154 126	- -	154 126	- -
- -	163 132 - -	191 172 - -	163 132 - -
173 153 (48 bottles)			
2.4"Touch display Yes	2.4"Touch display Yes	2.4"Touch display Yes	2.4"Touch display Yes
- I Yes	Yes I -	- I Yes	Yes I -
Yes	Yes	Yes	Yes
- Van	- Van	Yes	- Van
Yes	Yes	Yes	Yes
Yes I Yes	Yes I -	Yes I Yes	Yes I -
-	1 2		2
-	_	2	_
-1-		- -	Yes I Yes
Yes I Yes	Yes I Yes	Yes Yes	- -
162 162	Yes	-	Yes
3 2	- -	3 2	- -
Yes 1.2	-1-	Yes 1.2	-1-
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Left	Right	Left	Right
220 - 240 1.4	220 - 240 1.2	220 - 240 1.4	220 - 240 1.2
Germany	Germany	Germany	Germany
	definally		definally
Ventilation Cut Outs Tool To		Ventilation Cut outs special	





SBSes 8683 PremiumPlu	IS	SBSes 8474 Premium	
Bio Fresh- Plus Frost Maker Syste	r Soft Smart m Telescopic Steel	Bio No Ice Soft Fresh Frost Maker Syste	t Soft Smart m Telescopic Steel
SGNPes 4365	SKBes 4360	SBNes 4265	SKBes 4350
		204 5.5	194 4.0
211 5.0	194 4.0	20415.5	194 4.0
	·	·	•
315 262	413 366	345 298	411 367
	250 234 - -	154 126	250 234 - -
315 262	163 132	191 172	161 133
- -	- -	- -	- -
·	·		•
2.4"Touch display Yes	2.4"Touch display Yes	2.4"Touch display Yes	2.4"Touch display Yes
- I Yes	Yes I -	Yes I -	Yes I -
Yes -	Yes	Yes	Yes -
		Yes Yes	
Yes Yes Yes	Yes	Yes Yes	Yes Yes -
tes i tes	Yes -	tes i tes	res i -
-	1	2	
	۷	_	3
-1-	Yes Yes	- -	Yes I Yes
Yes I Yes	- -	Yes Yes	- -
tes i tes	Yes	-	Yes
7 2	- -	3 2	- -
Yes 0.8	- -	Yes 1.2	- -
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Left	Right	Left	Right
220 - 240 1.3	220 - 240 1.2	220 - 240 1.4	220 - 240 l 1.2
Germany	Germany	Germany	Germany
	definally		dermany
Ventilation Cut. Outs To spoons To spoons		Ventilation Cut. Outs Special	



*Side-by-Sides comprised of two models
Energy consumption (kWh/yr) I Star rating
Compressors
Total capacity litres (L) - Gross I Net
Refrigerator gross (L) I Refrigerator net (L)
Freezer gross (L) I Freezer net (L)
BioFresh gross (L) I BioFresh net (L)
Wine Zone gross (L) I Wine Zone net (L)
Control system and display Child proof
Lighting: PremiumPlus LED
Sabbath mode
DuoCoolina
SoftSystem hinge - assists closure
Alarms : Door open Temperature
BioFreshPlus drawers on telescopic rails
BioFresh drawers on telescopic rails
Fruit & vegetable drawer on telescopic rails
SuperCool VarioSafe
SuperFrost VarioSpace
Integrated bottle shelf
Freezer drawers I Ice cube drawer
IceMaker I Ice cube capacity (kg/24h)
Stainless steel door with SmartSteel
Stainless steel walls with SmartSteel / Stainless Steel walls
Default hinge
Voltage (V) Rated Current (A)
Made in
Installation Diagram
Millimetres (mm)
¹ Includes 15mm wall spacer fitted
Please note:
Wall spacers provided with the appliance must be used.
If the wall spacers are not used, the appliance will remain fully
functional but will have a slightly higher energy consumption level.
Cavity clearance for freestanding units allow minimum 50mm
above the unit if there is no ventilation cut-out.

SBSes 8673 Premium		SBSbs 8673 Premium		
Bio No Ice So Fresh Frost Maker Sys	oft Soft Smart tem Telescopic Steel	Bio No Ice Sc Fresh Frost Maker Sys	oft Soft Smart Black tem Telescopic Steel Steel	
SGNPes 4365	SKBes 4350	SGNPbs 4365	SKBbs 4350	
211 5.0	194 4.0	211 5.0	194 4.0	
1	1	1	1	
315 262	411 367	315 262	411 367	
- -	250 234	- -	250 234	
315 262	- -	315 262	- -	
- -	161 133	- -	161 133	
-1-	- -	- -	- -	
2.4"Touch display I Yes	2.4"Touch display I Yes	2.4"Touch display Yes	2.4"Touch display Yes	
- I Yes	Yes I -	- I Yes	Yes I -	
Yes	Yes	Yes	Yes	
-	-	-	-	
Yes	Yes	Yes	Yes	
Yes I Yes	Yes I -	Yes I Yes	Yes I -	
-	-	-	-	
-	3	-	3	
- -	Yes Yes	- -	Yes Yes	
Yes I Yes	- -	Yes I Yes	- -	
-	Yes	-	Yes	
712	- -	712	- -	
Yes 0.8	- -	Yes 0.8	-1-	
Yes	Yes	Yes	Yes	
Yes I -	Yes I -	Yes I -	Yes I -	
Left	Right	Left	Right	
220 - 240 1.3	220 - 240 1.2	220 - 240 1.3	220 - 240 1.2	
Germany	Germany	Germany	Germany	
015		015		
6151	+>~	6151	1->	



*Side-by-Sides comprised of two models
Energy consumption (kWh/yr) I Star rating
Compressors
Total capacity litres (L) - Gross I Net
Refrigerator gross (L) I Refrigerator net (L)
Freezer gross (L) Freezer net (L)
BioFresh gross (L) I BioFresh net (L)
Wine Zone gross (L) I Wine Zone net (L)
Control system and display I Child proof
LED lighting
Sabbath mode
DuoCooling
SoftSystem hinge - assists closure
Alarms : Door open I Temperature
BioFreshPlus drawers on telescopic rails
BioFresh drawers on telescopic rails
Fruit & vegetable drawer on telescopic rails
SuperCool VarioSafe
SuperFrost VarioSpace
Integrated bottle shelf
Freezer drawers I Ice cube drawer
IceMaker Ice cube capacity (kg/24h)
Stainless steel door with SmartSteel
Steel walls in silver finishing
Default hinge
Voltage (V) Rated Current (A)
Made in
Installation Diagram
Millimetres (mm)
Cavity clearance for freestanding units allow minimum 50mm
above the unit if there is no ventilation cut-out.

SBSes 7253 Premium Bio No Smart Steel		SBSef 7242 Comfort	
Fresh Frost Steel		Frost Steel	
SGNes 3010	SKBes 4210	SGNef 3036	SKef 4260
310 3.5	252 3.0	310 3.5	279 2.5
1	1	1	1
304 261	4031364	304 261	405 391
- -	277 247	- -	405 I 391
304 261	- -	304 261	- -
-1-	126 117	- -	- -
- -	- -	- -	- -
SoftTouch LCD Yes	SoftTouch LCD Yes	SoftTouch LCD Yes	SoftTouch LCD Yes
- I Yes	- I Yes	Yes	Yes
-	-	-	-
-	-	-	-
-	-	-	-
Yes I Yes	Yes I -	Yes I Yes	Yes I -
-	-	-	-
-	3	-	-
-	-	-	2
- -	Yes I -	- -	Yes I -
Yes I Yes	- -	Yes I Yes	- -
-	Yes	-	-
810	- -	81-	- -
- -	- -	- -	- -
Yes	Yes	Yes	Yes
- I Yes	- I Yes	Yes	Yes
Left	Right	Left	Right
220-240 1.3	220-240 1.2	220-240 1.3	220-240 1.2
Bulgaria	Bulgaria	Bulgaria	Bulgaria
Ventilation Cut approm	788	Vertilation Cut-outs 300cm 10 240	
\$80		****	



202 | 5.5

350 | 321 230 | 220 120 | 101 Touch-Electronic

Yes Yes Yes Yes Aluminium Yes I Yes

Yes

Yes

Yes Yes

Yes

Right, reversible 220-240 | 1.4

Germany

3





₹75 ▶

Energy consumption (kWh/yr) I Star rating
Compressors
Total capacity litres (L) - Gross I Net
Refrigerator gross (L) I Refrigerator net (L)
Freezer gross (L) I Freezer net (L)
MagicEye control system I Display
Child proof setting for display & temperature
LED standard lighting
Sabbath mode
DuoCooling
Handle with integrated opening device
Alarms : Door open I Temperature
BioCool-Box on telescopic rails
Fruit & vegetable drawer
SuperCool
SuperFrost
Freezer drawers
VarioSpace
Stainless steel door with SmartSteel
Steel walls in Silver finishing
Default hinge
Voltage (V) Rated Current (A)
Made in

Insta	llation	Diagram

Millimetres (mm)

¹ Includes 15mm wall spacer fitted

Please note:

Wall spacers provided with the appliance must be used. If the wall spacers are not used, the appliance will remain fully functional but will have a slightly higher energy consumption level.

Cavity clearance for freestanding units allow minimum 50mm above the unit if there is no ventilation cut-out.

CNef 4315 Comfort			CNF	
Bio	No	Duo	Smart	No
Cool	Frost	Cooling	Steel	Frost

CNPe	f 4516	Comfo	rt
No Frost	Duo Cooling	Smart Steel	

CINFEI 4510 Comion				
No Duo Smart Frost Cooling Steel				

CNPe	f 4416	Comfo
No	Duo	Smart

360 3.5	350 3.5
1	1
442 413	387 359
343 331	288 277
99 82	99 82
SoftTouch LCD	SoftTouch LED
Yes	Yes
Stainless steel	Stainless steel
Yes I Yes	Yes I Yes
-	-
2	2
Yes	Yes

Yes

Yes

Yes


Yes

Austria

Right, reversible

220-240 | 1.5

2



Yes

Yes

Yes


Yes

Austria

Right, reversible

220-240 | 1.5

2





~1400 (~1300)

~2100



5 (144) (14)
Energy consumption (kWh/yr) I Star rating
Compressors
Total capacity litres (L) - Gross I Net
Refrigerator gross (L) I net (L)
Freezer gross (L) I net (L)
BioFresh gross (L) I net (L) MagicEye control system I Display
PremiumPlus lighting
DuoCooling
Sabbath mode
SoftSystem hinge - assists closure
Alarms: Door open Temperature
Optional extra stainless steel panels & handles
BioFresh drawers on telescopic rails
SuperCool
Integrated bottle shelf
Freezer drawers I Ice cube drawer
SuperFrost
IceMaker Ice cube capacity (kg/24h)
Default hinge
Voltage (V) Rated Current (A)
Made in
Installation Diagram
Millimetres (mm)

ECBN 625	6 Premiu	umPlus			ECBN	6156	Premiu	mPlus
Bio No Fresh Frost	Duo Cooling	lce Maker	Soft System		Bio Fresh	No Frost	Duo Cooling	lce Maker
517 2.5					49613	2 N		
2					2			
585 480					58514	180		
329 295					32912			
183 116					183 1			
73 69					73 69			
SoftTouch I L	.CD				SoftTou	uch I LC	D	
Yes					Yes			
Yes					Yes			
Yes					Yes			
Yes					No			
Yes Yes					Yes Ye	es		
Yes					Yes			
2					2			
Yes					Yes			
Yes					Yes			
211					211			
Yes					Yes			
Yes 1.3					Yes I 1.			
French door						reversib	le	
220-240 1.	5					40 I 1.5		
Austria					Austria			
7300	2032	915	91	1088 1088 43 339 8 337 180		2300	2032	916
		1		(>		el el		


-1400 (-1300)


~2100

1146,9

12,7 341,3 6,4 334,9 177,8



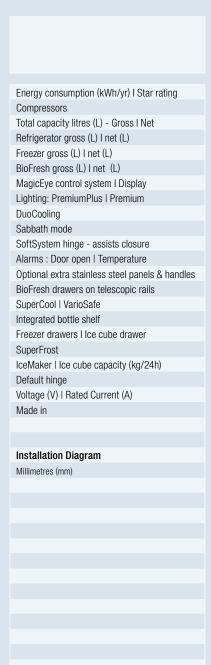

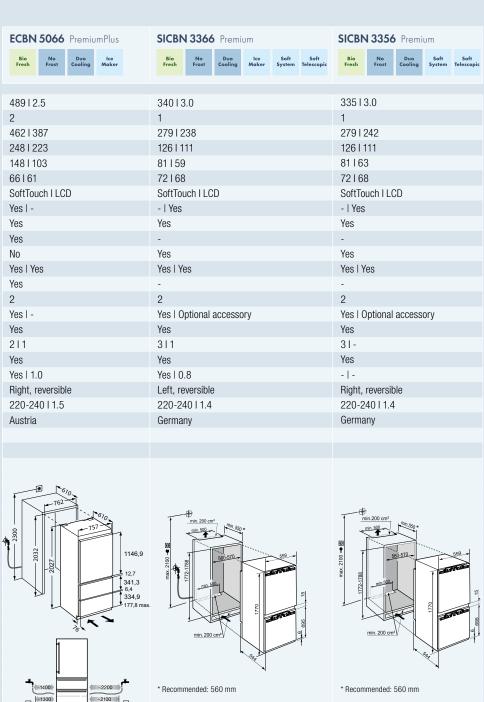



* Recommended: 560 mm

178








SICN 3366 Premium	SICN 3356 Premium
Sio No Duo Ice Soft Cooling Maker System	Bio No Duo Soft Cooling System
336 3.0	300 3.5
1	1
283 255	283 261
202 196	202 198
81 59	81 63
-1-	-1-
SoftTouch I LCD	SoftTouch I LCD
Yes	Yes
Yes	Yes
Yes	Yes
Yes I Yes	Yes I Yes
-	-
-	-
1	1
Yes I Yes	Yes Yes
-	-
3 1 Yes Yes	3 - Yes Yes
Yes (water tank) 0.8	- -
Left, reversible	Right, reversible
220-240 1.4	220-240 1.4
Germany	Germany
domany	domany
min. 200 cm² min. 500 560-570 559 min. 200 cm²	min. 200 cm² min. 500 min. 500 min. 500 min. 500 min. 500 min. 500 min. 200 cm² min. 200 cm²









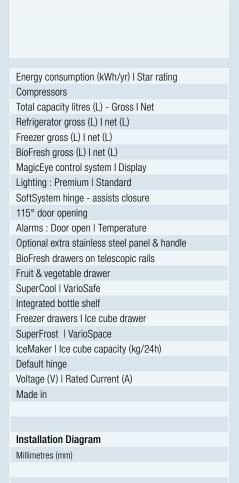


SIKB 3550 Premium		SIGN 3576 Premium			
Bio Soft Soft Fresh System Telescopic	No Frost	LED	lce Maker	Soft System	Telescopic Rails
328 1.5	331 I 3.	n			
1	1	5			
3441308	248120)7			
245 216	-1-				
-1-	248 20)7			
99 92	- -				
SoftTouch I LCD	SoftTou	ch I LC	D		
Yes I -	- I Yes				
Yes	Yes				
-	-				
Yes I -	Yes I Yes	3			
Yes	Yes				
3	-				
-	-				
Yes I Yes	- -				
Yes	-				
- -	811				
- -	Yes I Yes				
-1-	Yes 0.8				
Right, reversible	Left, rev		!		
220-240 1.2	220-24				
Germany	German	y			
──⊕		to.			
min. 200 cm² min. 500	2100 -	min	1	70.550 ×	





Undercounter



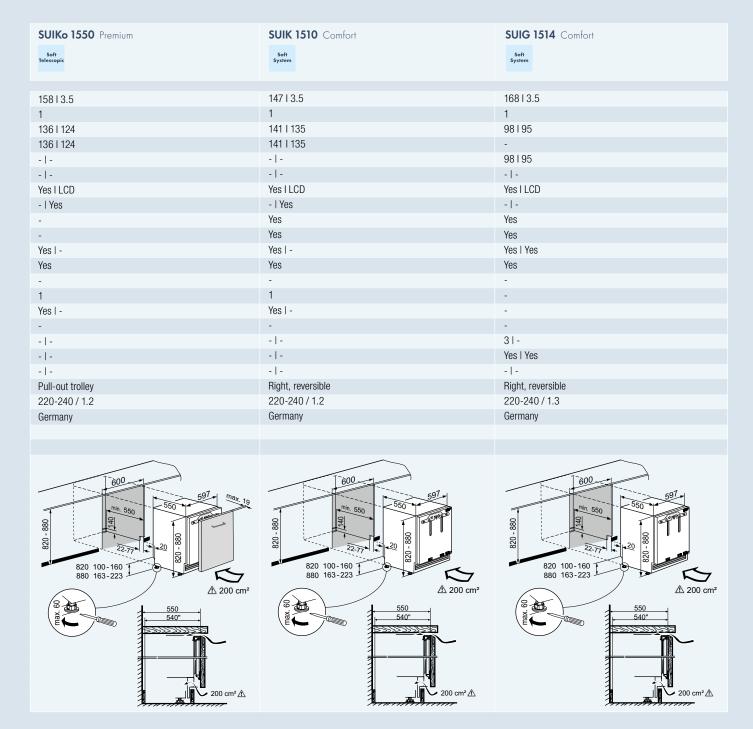







Door
Energy consumption (kWh/yr) I 24hr
Compressors
Bottle capacity (750ml Bordeaux)
Gross Net Litres
Safety glass I Tinted glazed door
MagicEye control system I Display
Temperature display Temperature zones
Temperature range (°C) Min I Max °C
Suitable for ambient temperature MinlMax°C
Interior light
Hand crafted beech wood shelves
Shelves mounted on telescopic rails
Presentation shelf I Base shelves
Shelves : Glass (one sectionable) Wire
Fresh air supply via activated charcoal filter
Child proof lock (control panel)
SoftSystem hinge - assists door closure
Key lock Label holders
Alarms : Door open I Temperature
Optional extra stainless steel frame & handle
Default hinge
Voltage (V) I Rated Current (A)
Made In
Installation Diagram
Millimetres (mm)

EWTdf 3553	Vinidor	UWTes 1672 Vinidor
LED Wine	Soft Telescopic System Rails	LED Wine Telescopic Rails
Own Cabinetry		Stainless Steel
°162 0.443		°196 I 0.520
1		1
80		34
- -		-1-
Yes Triple		Yes Double
SoftTouch I LCD		Yes I LED
Internal I 2		Internal 2
5120		5120
10 43		10 38
Dimmable LED		Dimmable LED
9		3
Yes		Yes
Yes I 2		-12
- -		- - -
Yes		Yes
Yes		Yes -
Yes - I Yes		Yes I Yes
Yes Yes		Yes I Yes
Yes		-
right, reversible		right, reversible
220-240 1.0		220-24010.8
Austria		Austria
raotra		, tootha
* Recommended: 56	585	86 mm
^* Images show stair	nless steel frame fitted	

- 1 These models are only bound for storing wine. Maximum DIN norm bordeaux bottles capacity (0.75 l) as per norm NF H 35-124 (H: 300.5 mm, Ø 76.1 mm).

 ° = Measurements taken at +25°C ambient and +12°C interior temperature tested by Liebherr Germany (not to Australian standards.











Davis
Door
Energy consumption (kWh/yr) I 24hr
Compressors
Bottle capacity (750ml Bordeaux)
Gross Net Litres
Safety glass I Tinted glazed door
MagicEye control system I Display
Temperature display Temperature zones
Temperature range (°C) Min I Max °C
Suitable for ambient temperature MinlMax°C
Interior light
Hand crafted beech wood shelves
Shelves mounted on telescopic rails
Presentation shelf I Base shelves
Shelves : Glass (one sectionable) Wire
Fresh air supply via activated charcoal filter
Child proof lock (control panel)
SoftSystem hinge - assists door closure
Key lock Label holders
Alarms : Door open Temperature
Optional extra stainless steel frame & handle
Default hinge
Voltage (V) Rated Current (A)
Made In
Installation Diagram
Millimetres (mm)

	,
	١
	ı
	ı
	;
	١
	١
	١
	١
	١
	1
	1
	1

UWKes 1752 GrandCru	UKes 1752
LED Wine Telescopic Rails	LED Wine Telescopic Rails
	Obelin Inno Oberl
Stainless Steel	Stainless Steel 337 I 0.923
°145 0.396	1
46	-
- -	131 108
Yes Double	Yes I Double
Yes I LED	Yes I LED
Internal 1	Internal I 1
5120	2120
10 38	10 38
LED	LED
3	-
Yes	-
-11	-11
- -	2 1
Yes	-
Yes	Yes
-	-
Yes I Yes	Yes I -
Yes I Yes	Yes I Yes
-	-
right, reversible	right, reversible
220-24010.8	220-240 0.8
Austria	Austria





 $^{^{\}circ} = \text{Measurements taken at } + 25^{\circ}\text{C ambient and } + 12^{\circ}\text{C interior temperature tested by Liebherr Germany (not to Australian standards)}.$











Click the link to directly access our social media channels: socialmedia.home.liebherr.com

For more information please visit us at:

Andi-Co Australia

Head Office 1 Stamford Road, Oakleigh Victoria 3166

Phone: 1800 685 899 Email: sales@andico.com.au