

 adf



castworks
home heating specialists

castworks.com.au

FREESTANDING FIRES

ADF have a proud heritage with over 40 years of providing high quality and durable heating systems. Coupled with a sleek European design and manufacture, ADF brings the next level in quality and functionality to the linear wood heater options in the Australian market.

The unique automatic flue damper system significantly reduces smoke ingress to the room on re-fuelling (available on all models). The simplicity in design of the air wash and primary air system belies how well these beautiful fires operate.

820NM-RS



- ✓ Contemporary design with rounded corners
- ✓ Comes with matching rounded bench
- ✓ 5 mm steel firebox (all models)
- ✓ Heats up to 200m² through natural convection and radiant warmth boosted by optional fan

Dimensions

| | |
|--------------------|-------|
| Width | 820mm |
| Height incl. bench | 860mm |
| Depth | 445mm |
| Weight | 200kg |

820NMV-B



- ✓ Sleek minimalist design
- ✓ Optional bench
- ✓ Heats up to 200m² through natural convection and radiant warmth boosted by optional fan
- ✓ Robust vermiculite firebox (all models)

Dimensions

| | |
|--------------------|-------|
| Width | 830mm |
| Height excl. bench | 465mm |
| Depth | 450mm |
| Weight | 160kg |

Measurements and weight do not include bench

Specifications

| | |
|-------------------|-------------------------|
| Heat output | 13.1kW |
| Approx. heat area | 150 - 200m ² |
| Efficiency | 63% |
| Emissions | 0.8g/kg |
| Flue Diameter | 202mm (8") |

Hearth Dimensions

| | |
|----------------------------------------|--------|
| Thickness (Bellis board or equivalent) | 18mm |
| Width | 1070mm |
| Depth* | 1095mm |

* Depth includes a min 650 in front of the unit

Clearance to combustible wall

| | |
|------------------------------------------------------------------------|-------|
| Parallel no shielding: | |
| Sides | 475mm |
| Rear | 400mm |
| Parallel with 25mm thick Skamotec wall 1720mm (w) x 1200mm (d): | |
| Sides | 475mm |
| Rear | 175mm |
| Parallel with 180 x 900mm s/s rear flue shield and firebox heatshield: | |
| Sides | 475mm |
| Rear | 200mm |

Overseas model shown

FREESTANDING FIRES

1000NMV-P



- ✓ Freestanding clean lines are balanced by the pedestal base (included)
- ✓ Door handles cleverly hidden to enhance the design
- ✓ Pure radiant and natural convection
- ✓ Easy to install vermiculite linings

Dimensions

| | |
|--------|--------|
| Width | 1010mm |
| Height | 880mm |
| Depth | 450mm |
| Weight | 206kg |

1000NMV-B



- ✓ Large firebox with equally large glass viewing area
- ✓ Optional sturdy bench or create your own bespoke stand
- ✓ Unique flue damper system reduces smoke issues with re-fuelling common with other lineal designs
- ✓ Optional Fan

Dimensions

| | |
|--------|--------|
| Width | 1010mm |
| Height | 465mm |
| Depth | 450mm |
| Weight | 175kg |

Measurements and weight do not include bench

Specifications

| | |
|-------------------|-------------------------|
| Heat output | 17kW |
| Approx. heat area | 200 - 250m ² |
| Efficiency | 64% |
| Emissions | 1.2g/kg |
| Flue Diameter | 202mm (8") |

Hearth Dimensions

| | |
|----------------------------------------|--------|
| Thickness (Bellis board or equivalent) | 24mm |
| Width | 1250mm |
| Depth* | 1240mm |

* Depth includes a min 750 in front of the unit

Clearance to combustible wall

| | | |
|------------------------------------------------------------------------|-------|-------|
| Parallel no shielding: | Sides | 525mm |
| | Rear | 300mm |
| Parallel with 25mm thick Skamotec wall 1910mm (w) x 1710mm (d): | Sides | 525mm |
| | Rear | 50mm |
| Parallel with 180 x 900mm s/s rear flue shield and firebox heatshield: | Sides | 525mm |
| | Rear | 100mm |



INSERT FIRES

820NMV



- ✓ Triple Combustion system creates a dramatic flame pattern
- ✓ Includes minimalistic frame
- ✓ Radiant and natural convection with optional fan
- ✓ Skamotec enclosure system

Dimensions

| | |
|--------|-------|
| Width | 830mm |
| Height | 465mm |
| Depth | 450mm |
| Weight | 158kg |

Specifications

| | |
|-------------------|-------------------------|
| Heat output | 13.1kW |
| Approx. heat area | 150 - 200m ² |
| Efficiency | 63% |
| Emissions | 0.8g/kg |
| Flue Diameter | 202mm (8') |

Hearth Dimensions

| | |
|----------------------------------------|--------|
| Thickness (Bellis board or equivalent) | 18mm |
| Width | 1170mm |
| Depth* | 650mm |

1000NMV



- ✓ Easily heats up to 250m²
- ✓ Ducted system options for more efficient heat transfer (all inserts)
- ✓ Unique flue damper system (all models)
- ✓ Skamotec enclosure system

Dimensions

| | |
|--------|--------|
| Width | 1010mm |
| Height | 465mm |
| Depth | 450mm |
| Weight | 172kg |

Specifications

| | |
|-------------------|-------------------------|
| Heat output | 17kW |
| Approx. heat area | 200 - 250m ² |
| Efficiency | 64% |
| Emissions | 1.2g/kg |
| Flue Diameter | 202mm (8') |

Hearth Dimensions

| | |
|----------------------------------------|--------|
| Thickness (Bellis board or equivalent) | 24mm |
| Width | 1250mm |
| Depth* | 750mm |



ABOUT CASTWORKS & ADF

Castworks have been the leading distributor of high quality, European-designed fireplaces for over twenty years and continue to source only the finest products with unique designs and features. Castworks are proud to introduce ADF to their family of products.

Based in Portugal, ADF source only the best components from highly regarded European suppliers allowing for a 5-year warranty on most aspects of the fire.

All units have been tested and comply with AS2918 / AS4012/4013.



castworks
home heating specialists

DISTRIBUTORS FOR



Your ADF dealer

SKAMOTEC 225 for fireplace enclosures




SKAMOTEC 225 is a light-weight, non-combustible building board that can resist temperatures up to 1000 degrees Celsius. This easy to install product simplifies the construction process by eliminating the need for steel or wood frame constructions. The result is a complete one product solution for your fireplace enclosure that solves a significant challenge facing dealers and installers today – recurring cracks and costly callbacks. When installed correctly, the SKAMOTEC 225 solution will virtually eliminate cracks.



One building product - multiple design solutions

Due to the strength of SKAMOTEC 225, installers are able to apply various finishing materials, e.g. stone and tile. Multiple types of fireplace enclosures can be built using the product.

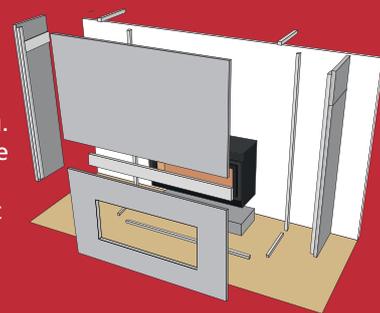

Most enclosures can be built using only SKAMOTEC 225, replacing the need for light-frame construction and wall covering. This eliminates a complete stage in the construction process, combining multiple building materials into one.

SKAMOTEC 225 can be used for both traditional and contemporary fireplace installations.

To see more inspiring examples of the Skamo enclosure using SKAMOTEC 225 visit castworks.com.au