

BLU  
Performance

# Freshness With Style And Elegance

Quality, Design and Innovation



SGNPbs 4365 & SKBbs 4350

# LIEBHERR



**2.4" Touchscreen Display:** Located behind the appliance door, this high-resolution and high-contrast 2.4" touchscreen display can be read from any angle. Stored menu options are intuitive and easy-to-operate.



**BioFresh:** When stored at Biofresh's precisely maintained temperature of 0°C and correct humidity level, nutrients in your food are retained. Our BioFresh drawers fully extend on telescopic rails and feature a self-closing mechanism.



**PowerCooling:** A high-performance system that allows freshly stored items to be chilled rapidly while maintaining an even temperature throughout the interior. In this energy-efficient BluPerformance range, the fan switches off when the appliance door is opened, saving valuable energy.

Volume, efficiency, economy, ease of use, and outstanding design are the key features of the **SBSbs 8673** BlackSteel side-by-side fridge-freezer from Liebherr's BluPerformance series. High-quality components and materials, and perfect workmanship combined with precise touch electronics system are what made this appliance so efficient.


BioFresh technology allows your fruits, vegetables, meat, fish, and dairy products to stay fresher for longer. Meanwhile NoFrost technology ensures that this appliance never has to be defrosted. And thanks to its premium SmartSteel surface, this timelessly elegant model is easy to clean and will definitely be a visual highlight in your home!

**SBSbs 8673**  
Premium




*Side-by-Sides comprised of two models	SGNPbs 4365	SKBbs 4350
Energy consumption (kWh/yr)   Star rating	211   5.0	194   4.0
Compressors	1	1
Total capacity litres (L) - Gross   Net	315   262	411   367
Refrigerator gross (L)   Refrigerator net (L)	-   -	250   234
Freezer gross (L)   Freezer net (L)	315   262	-   -
BioFresh gross (L)   BioFresh net (L)	-   -	161   133
Control system and display   Child proof	2.4" Touch display   Yes	2.4" Touch display   Yes
PremiumPlus   LED : lighting	-   Yes	Yes   -
Sabbath mode	Yes	Yes
SoftSystem hinge - assists closure	Yes	Yes
Door open   Temperature : alarms	Yes   Yes	Yes   -
BioFresh drawers on telescopic rails	-	3
SuperCool   VarioSafe	-   -	Yes   Yes
SuperFrost   VarioSpace	Yes   Yes	-   -
Integrated bottle shelf	-	Yes
Freezer drawers   Ice cube drawer	8   1	-   -
IceMaker   Ice cube capacity (kg/24h)	Yes   0.8	-   -
Stainless steel door with SmartSteel	Yes	Yes
Stainless steel walls with SmartSteel	Yes	Yes
Default hinge	Left	Right
Voltage (V)   Rated Current (A)	220 - 240   1.3	220 - 240   1.2
Made in	Germany	Germany

**Installation Diagram**

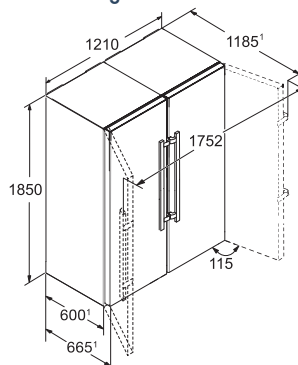

1 To achieve the indicated energy consumption level, the wall spacers provided with the appliance must be used. This increases the appliance depth by approximately 1.5 cm. If the wall spacers are not used, the appliance will remain fully functional, but will have a slightly higher energy consumption level.

**Water Connection**

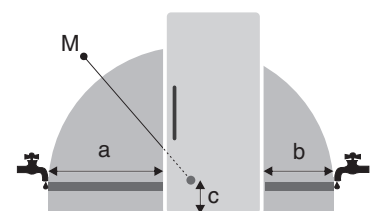

a = 1100 mm  
b = 700 mm  
c = 110 mm  
M = Solenoid valve

Plumbing must be installed adjacent to the side of the appliance which contains the IceMaker.  
Water pressure must be between 0.15 MPa and 0.6 MPa (1.5 bar - 6 bar)