

BLU
Performance

The Big, Cool Combination

Quality, Design and Innovation

SBNes 4265 & SKBes 4360

LIEBHERR



2.4" Touchscreen Display: Located behind the appliance door, this high-resolution and high-contrast 2.4" touchscreen display can be read from any angle. Stored menu options are intuitive and easy-to-operate.



BioFresh-Plus: With the adjustable temperature range of 0°C and -2°C, BioFresh-Plus technology offers even more flexibility for your produce. The BioFresh-Plus drawer includes a versatile Fish & Seafood-Safe.



PowerCooling: A high-performance system that allows freshly stored items to be chilled rapidly while maintaining an even temperature throughout the interior. In this energy-efficient BluPerformance range, the fan switches off when the appliance door is opened, saving valuable energy.

The **SBSes 8484** Side-by-Side fridge-freezer from the BluPerformance series combines plenty of storage space with perfect cooling performance for long-lasting freshness. This unit can be precisely controlled via the touch electronics system with digital temperature display. Meanwhile BioFresh-Plus allows added storage flexibility and a longer shelf life for fruits, vegetables, fish, meat, and dairy products. And thanks to Liebherr's innovative NoFrost technology, the appliance never has to be defrosted.


With elegant and timeless design in combination with high-quality materials, components, and workmanship, this model will continue to catch the eye for many years to come.

SBSes 8484
PremiumPlus




*Side-by-Sides comprised of two models	SBNeS 4265	SKBeS 4360
Energy consumption (kWh/yr) Star rating	204 5.5	194 4.0
Compressors	1	1
Total capacity litres (L) - Gross Net	345 298	413 366
Refrigerator gross (L) Refrigerator net (L)	191 172	250 234
Freezer gross (L) Freezer net (L)	154 126	- -
BioFresh gross (L) BioFresh net (L)	Included above	163 132
Control system and display Child proof	2.4" Touch display Yes	2.4" Touch display Yes
PremiumPlus lighting	Yes	Yes
Sabbath mode	Yes	Yes
DuoCooling	Yes	-
SoftSystem hinge - assists closure	Yes	Yes
Door open Temperature : alarms	Yes Yes	Yes -
BioFreshPlus drawers on telescopic rails	-	1
BioFresh drawers on telescopic rails	2	2
SuperCool VarioSafe	- -	Yes Yes
SuperFrost VarioSpace	Yes Yes	- -
Integrated bottle shelf	-	Yes
Freezer drawers Ice cube drawer	4 1	- -
IceMaker Ice cube capacity (kg/24h)	Yes 1.2	- -
Stainless steel door with SmartSteel	Yes	Yes
Stainless steel walls with SmartSteel	Yes	Yes
Default hinge	Left	Right
Voltage (V) Rated Current (A)	220 - 240 1.4	220 - 240 1.2
Made in	Germany	Germany

Installation Diagram

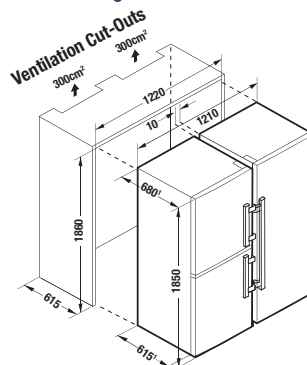

1 To achieve the indicated energy consumption level, the wall spacers provided with the appliance must be used. This increases the appliance depth by approximately 1.5 cm. If the wall spacers are not used, the appliance will remain fully functional, but will have a slightly higher energy consumption level.

Water Connection

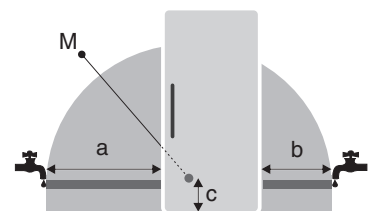

a = 1100 mm
b = 700 mm
c = 110 mm

M = Solenoid valve

Plumbing must be installed adjacent to the side of the appliance which contains the IceMaker.

Water pressure must be between 0.15 MPa and 0.6 MPa (1.5 bar - 6 bar)