



schweigen

CLASSIC SILENT RANGEHOODS

wall canopies / undermount rangehoods
ceiling cassettes / island rangehoods
bathroom extraction
silent motor systems

Product Catalog
2016/2017

www.schweigen.com.au

Silent Rangehood quality without compromise

Our promise to you

Schweigen is a leading Australian owned kitchen appliance brand who pioneered the silent rangehood solution with a collection of premium European style canopies.

For more than a decade, Schweigen has conducted considerable research, testing and refinement to offer a rangehood that is silent, efficient and powerful. Integrating a German motor and the best in canopy design, we patented the Isodrive® system to suit local cooking needs and Australian climatic conditions. Our rangehoods are widely acknowledged as the quietest and most efficient high-powered domestic extraction unit available in Australia.

We are committed to growing our reputation for the best silent rangehood system and consistently delivering great Australian quality customer service.



"We have built an enviable reputation by offering the finest silent rangehood solution in the market today. Our partnership with European designers and manufacturers allows us to continue to provide appliances that represent quality and outstanding value to Australian homes."

A handwritten signature in black ink, reading "Anthony Fletcher".

Anthony Fletcher,
Managing Director, Schweigen

COMMITMENT TO DESIGN & INNOVATION

Schweigen has always been committed to providing products which focus on design excellence.

Our partners include our Brand Ambassador and international award winning Interior Designer Mal Corboy.



Pictured: Stainless steel ceiling cassette UM4220-12S featured in Mal Corboy's Waiheke New Zealand kitchen.

Reasons to choose a Schweigen Silent Rangehood



Silent

The Isodrive® motor is silent - removed from the canopy and mounted outside the home.



Trust an Australian Company

A wholly Australian owned business, so you know you'll receive quality product and service.



German Engineered Reliability

Built with quality and precision, the Schweigen silent Isodrive® guarantees performance and reliability for years to come.



10 Year Warranty

Offering customers peace of mind with a full 10 Year Warranty on the Isodrive® motor.



Lifetime Filter Warranty

Easy to remove, dishwasher safe, and guaranteed for the life of the filter.



Efficient*

Using a mere 62 watts to deliver high powered efficiency and energy savings of more than 300%.




Powerful

Extracts heavy steam, smoke and cooking odours leaving your kitchen fresher.



Service & Installation**

Australian Customer Support offers you a service and installation network you'd expect from a premium product.



Ducting Included

Schweigen makes purchasing a rangehood easy by including a custom flexi ducting kit.



HIA Member

We are a proud member of the Housing Industry Association (Australia).



Gold Sponsor of KBDI

Schweigen is officially a Gold sponsor for the Kitchen & Bathroom Designers Institute.

* Efficiency varies between power options. Isodrive® motor has a 10 Year replacement product warranty. This Warranty covers fan and motor unit only. For more information please refer to your warranty card. The period during which the Lifetime Filter Warranty is in effect will depend upon the life of your appliance.

**Does not apply to remote and rural areas in Australia.

The Isodrive® silent system efficiently extracts steam, smoke, and odours and expels it externally.



*Images are not to scale and proportion, they are for illustration purposes only.

How can a rangehood be silent?

Few of our competitors can deliver a silent solution because they do not offer the same system.

The Schweigen silent rangehood solution is revolutionary, starting with a German fan and motor assembly, acknowledged as the most quiet, efficient, and powerful domestic extraction unit available.

We call it our Isodrive® silent system.

Schweigen's patented Isodrive® solution is to take the fan and motor out of the canopy and mount them outside the home on the roof, wall or eave. We also incorporate an 's' bend into the flexi-ducting, which optimises airflow and contributes to performance efficiency.

The only resulting sound you may notice in your kitchen is the airflow being pulled through the filter and ducting. The little noise that is generated outside, is overwhelmed by the ambient environment.

We provide a motor 'housing' to protect the motor from the weather elements. It is manufactured from the most highly durable ASA plastic exclusive to Schweigen rangehoods.


Our filters are high quality too, and come with a Lifetime Warranty. We offer aluminium and stainless steel filters that are easy to remove and safe to clean in the dishwasher.



About installation

The Schweigen Isodrive® motor is located outside your home, mounted on the **roof, wall** or **eave**.

The most common type of installation is roof-mounted and this suits most homes with a roof cavity.

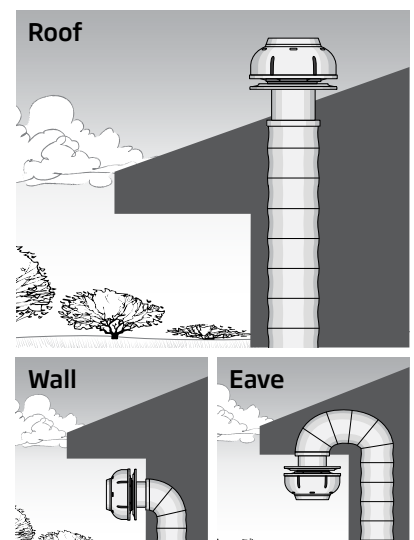

Schweigen's silent motors are pre-tested at our manufacturing plant to the equivalent of 20 years' worth of average day-to-day usage to ensure your peace of mind. Our Isodrive® motors are engineered to the highest standards.

*Please note: *not* all motors can be eave mounted, please refer to page 11 for more info.



3 times more energy efficient


The term 'energy efficient' is often confused with 'suction', implying that greater suction equates to greater efficiency. This is incorrect and quite misleading.

Strong suction is easily achieved by applying more power. However, power consumes more energy and is therefore very inefficient.

Ideally, an appliance that requires the least amount of energy to complete its task is the most efficient. This is where Schweigen excels. Our Isodrive® motor is not only

the quietest extraction system, but also the **most energy efficient**. Because the motor is mounted externally, the air is *pulled*, rather than *pushed* through the system. The result is **less airflow resistance**, which in turn, requires less energy to achieve the same task. While traditional systems use roughly 190 watts or more, the direct Isodrive® 650 combined with LED lights runs on a mere 69 watts.

That's 3 times more efficient when compared to a traditional motored hood!

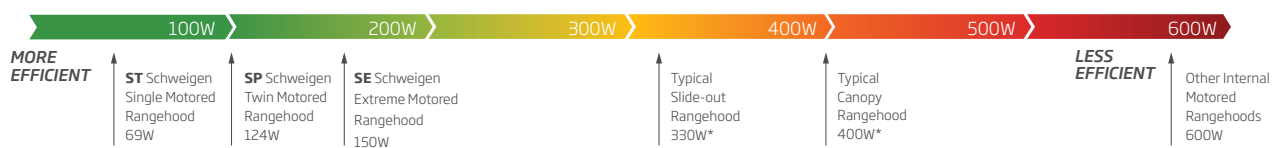

Fresher kitchen air

Extract unhygienic bacteria, grease, and grime to leave the air smelling fresh and clean and prevent an oily film from settling on cooking surfaces and bench-tops.



Easy to clean filter

Designed to minimise the number of corners or edges where grease can lodge, Schweigen rangehoods are easy to clean. Our steel or aluminium filters are effective at trapping grease, while the closed design means the motor is protected from dirt and oil, ensuring a longer lifespan.



Optional baffle filter

Baffle filters are available as an after market purchase only. After the product is installed and working, please contact our Sales team for prices and to order on **1300 881 693**. UM-9S, UM-12UMS are baffle filtered models which also are available with mesh filters. Note: Conditions apply - please refer to page 33 of the brochure for information about usage.



Selecting your rangehood

3 steps to choosing a Schweigen silent rangehood.

If you have a smaller kitchen or prefer a sleek minimalist style, then you should choose one of our elegant **undermount** designs. If you have the space, we recommend a **wall mounted** design. A kitchen island or peninsula bench-top layout needs an **island hood** or a **ceiling cassette** design. These can also be built into a bulkhead, to create a real *style statement*.

The width of the rangehood needs to adequately accommodate the cooktop underneath it, in order to optimise airflow extraction efficiently.

Choose a motor power option that will accommodate your cooking style: Light, Moderate, Heavy, Supreme or Extreme. See over the page for more on choosing the right motor power options. Once you select a motor power you will finally enjoy a quiet kitchen.



01

Choose a rangehood design

Wall Mounted canopies / Undermount rangehoods / Ceiling cassettes / Island rangehoods / BBQ rangehoods / Bathroom extraction



Choose an Isodrive® Power Option

There is a power option to suit your chosen rangehood design and cooking technique. Refer to the Motor Option table for all motor options.

02



03

Enjoy the Silence

Extract steam, smoke and odours with a Silent, Efficient & Powerful Schweigen Rangehood.








Selecting the right rangehood motor

To maximise the performance of your rangehood, it is important to select a motor power option that suits the cooking technique you use the most.

The table below will help you identify the motor power option best suited to your canopy and cooking extraction needs.

Dishes high in spice ingredients or with intense smoke generated from a wok or grill, require much stronger extraction power to perform effectively.

Motor Power Options

<div>LIGHT</div> <div>MODERATE</div> <div>HEAVY</div> <div>SUPREME</div> <div>EXTREME</div>		S1. Isodrive® 650 <ul style="list-style-type: none"> • Everyday Steaming / Light Pan Frying • 650 m³/h of airflow • Motor housing is made from ASA, the most durable of plastics in direct sunlight. • Motor comes with flexi ducting, solid roof extension pipe and bell housing.
		ST. Isodrive® 900 <ul style="list-style-type: none"> • Everyday Steaming / Pan Frying / Grilling • 900 m³/h of airflow • Motor housing is made from ASA, the most durable of plastics in direct sunlight. • Motor comes with flexi ducting, solid roof extension pipe and bell housing.
		SP. Isodrive® 1600 <ul style="list-style-type: none"> • Heavy Steaming / Spicy Wok Frying / Grilling • 1600 m³/h of airflow • Motor housing is powder coated galvanized steel, which can be painted to any colour. • Motor comes with flexi ducting, solid roof extension pipe and bell housing. • Suggested minimum power option for 90cm rangehoods over induction cooktops.
		SP2. Isodrive® 3000 <ul style="list-style-type: none"> • All Cooking Styles (Cassette / Al Fresco Canopies) • 3000 m³/h of airflow • Motor housing is powder coated galvanized steel, which can be painted to any colour. • Motor comes with flexi ducting, solid roof extension pipe and bell housing. • Y joint may be required.
		SE. Isodrive® 3200 <ul style="list-style-type: none"> • All Cooking Styles (Cassette / Al Fresco Canopies) • 3200 m³/h of airflow • Motor housing is powder coated galvanized steel, which can be painted to any colour. • Motor comes with flexi ducting, solid roof extension pipe and Y joint.

Model No.	Airflow	Configuration	Duct width	Duct length	Install Roof	Install Wall	Install Eaves	Canopy type
S1	650 m³/h	Single	150 mm	4 m	•	•	•	Wall, Island, Undermount
ST	900 m³/h	Single	200 mm	4 m	•	•	-	Wall, Island, Undermount
SP	1600 m³/h	Single	200 mm	6 m	•	•	-	Wall, Island, Undermount*
SP2	3000 m³/h	Twin	200 mm	6 m	•	•	-	Cassette
SE	3200 m³/h	Single	250 mm	4 m	•	•	-	Cassette

*Exception: UM-12UMS undermount (1200mm) requires an SP. 1600 motor power.

Wall mounted rangehoods


The classic solution
to kitchen cooking
extraction



» DS3131S rangehood/**WALL MOUNT**/



- **innovative design** - stainless steel canopy featuring a blue light display, creates a modern and unique kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

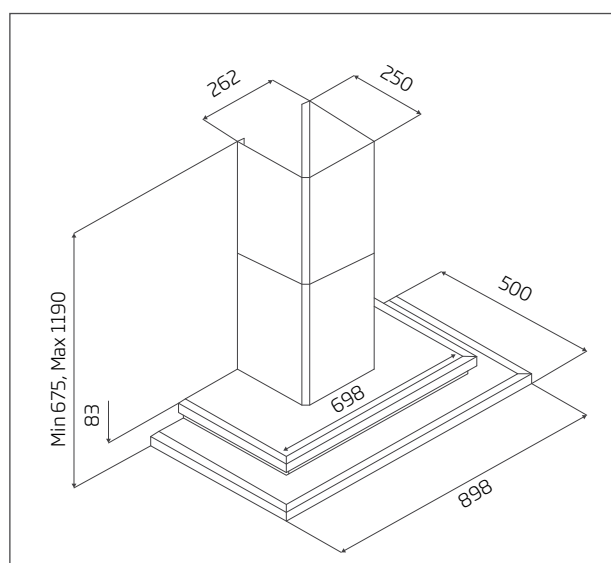


Description	Technical data	Motor options
<ul style="list-style-type: none"> • stainless steel finish • blue light display • silent Isodrive® motor system • soft touch controls, digital display • 5 x speed levels • 15 minute delay timer with auto shut off • 2 x halogen lights • stainless steel, dishwasher safe filters • 10 Year Warranty on Isodrive® motor • 3 Year Warranty on canopy 	DS3131S <ul style="list-style-type: none"> • dimensions: (W x D) 898 x 500 mm • 3 x filters 	<ul style="list-style-type: none"> • S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves • ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall • SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

>> WM3150-6S, WM3150S rangehood/**WALL MOUNT**/



- **innovative design** - tempered glass curved "butterfly" and stainless steel canopy, creates a light and modern kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

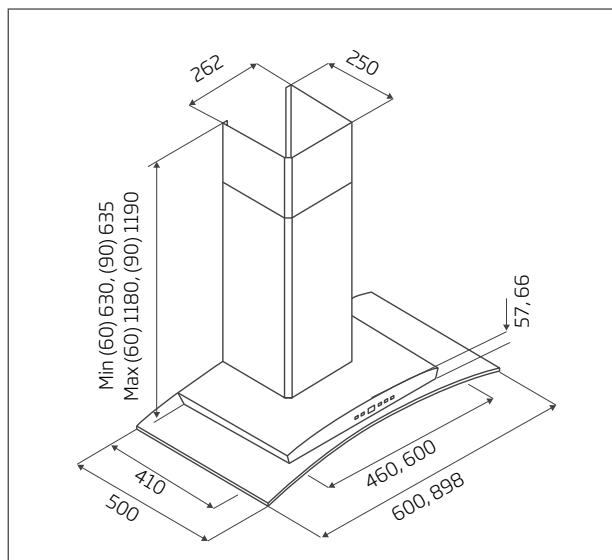


Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel & glass design silent Isodrive® motor system soft touch controls, digital display 5 x speed levels 15 minute delay timer with auto shut off 2 x halogen lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	<p>WM3150-6S</p> <ul style="list-style-type: none"> dimensions: (W x D) 600 x 500 mm 1 x filter <p>WM3150S</p> <ul style="list-style-type: none"> dimensions: (W x D) 898 x 500 mm 2 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

» DS3170S, DS3170-12S rangehood/**WALL MOUNT**/



- **innovative design** - square-edged European style stainless steel canopy, creates a bold, modern kitchen look.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

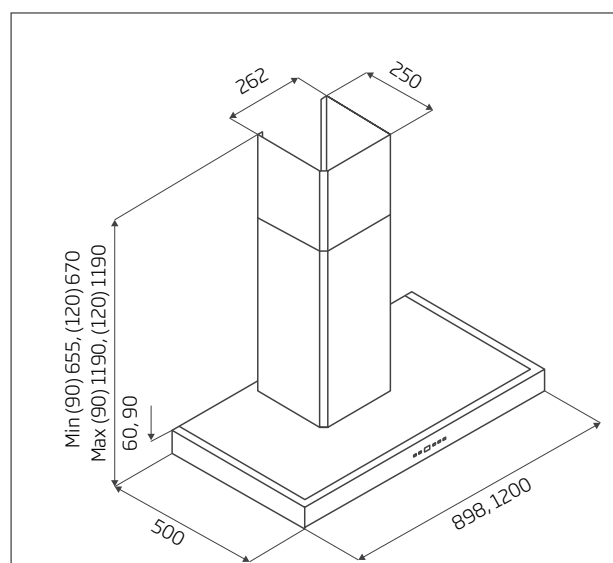

Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel finish silent Isodrive® motor system soft touch controls, digital display 5 x speed levels 15 minute delay timer with auto shut off halogen lighting stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	<p>DS3170S</p> <ul style="list-style-type: none"> dimensions: (W x D) 898 x 500 mm 3 x filters 2 x halogen lights <p>DS3170-12S*</p> <ul style="list-style-type: none"> dimensions: (W x D) 1200 x 500 mm 4 x filters 3 x halogen lights 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall


*Note: This model only available for SP 1600 Isodrive® motor.



WM2190-6S, WM2190S rangehood/**WALL MOUNT**/




- **classic design** - contemporary European stainless steel canopy with softer lines, creates a classic kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.


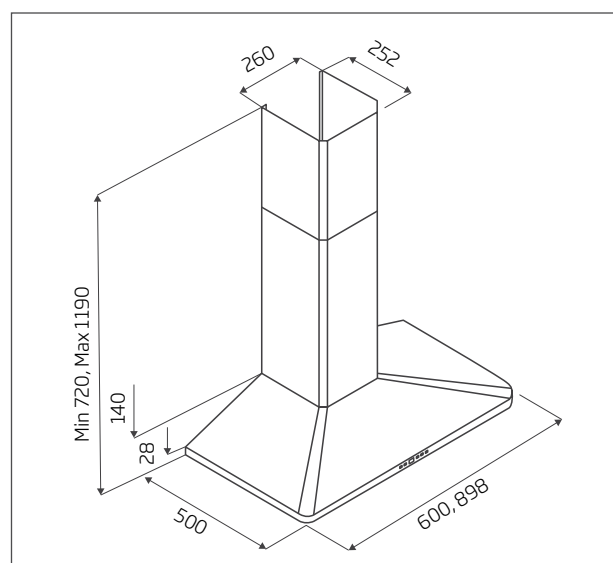


Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel finish silent Isodrive® motor system soft touch controls, digital display 5 x speed levels 15 minute delay timer with auto shut off 2 x halogen lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	<p>WM2190-6S</p> <ul style="list-style-type: none"> dimensions: (W x D) 600 x 500 mm 2 x filters <p>WM2190S</p> <ul style="list-style-type: none"> dimensions: (W x D) 898 x 500 mm 3 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

» WM-EX90S rangehood/**WALL MOUNT**/

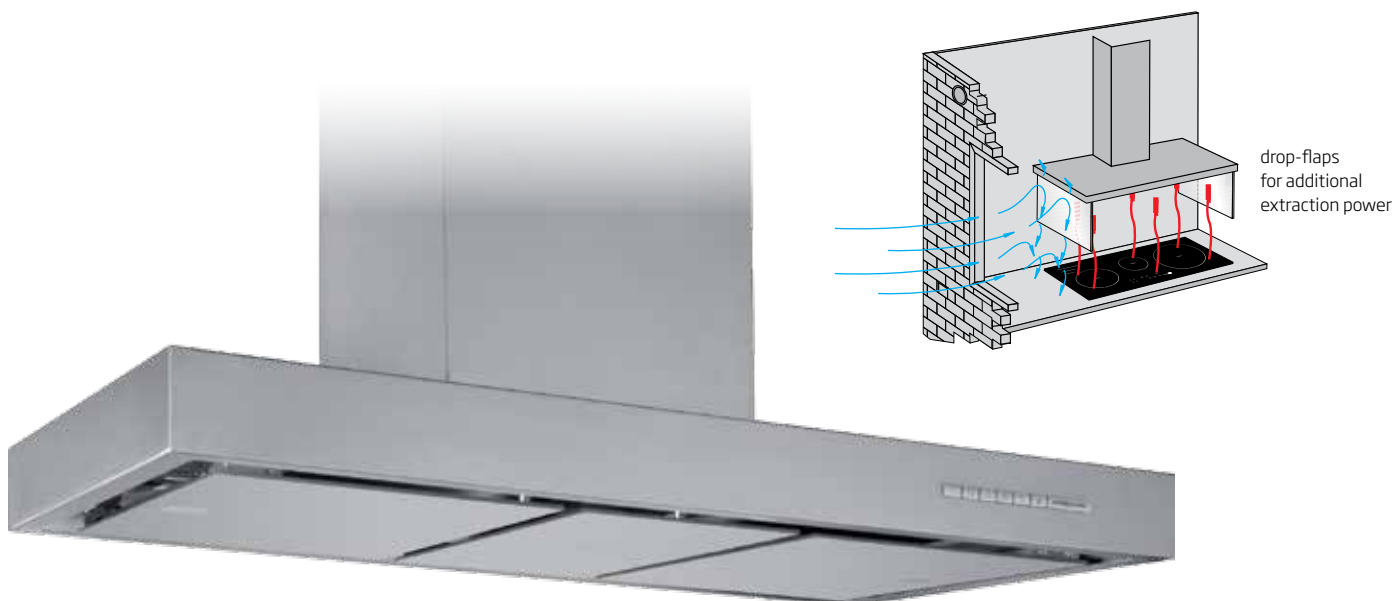

- **innovative design** - square-edged European style stainless steel canopy, creates a bold, modern kitchen look.
- **powerful silent extraction** - German engineered Isodrive® motor with Perimeter Aspiration delivers effective, efficient extraction of steam, smoke and odours, with drop-flaps for additional extraction power, leaves kitchen air fresher.
- **Perimeter Aspiration** - as smoke and steam rises, it is directed to the outer edges of the canopy, before extracting it more evenly through the filter.
- **convenient features** - soft-touch control with 4 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

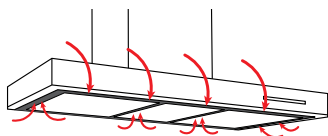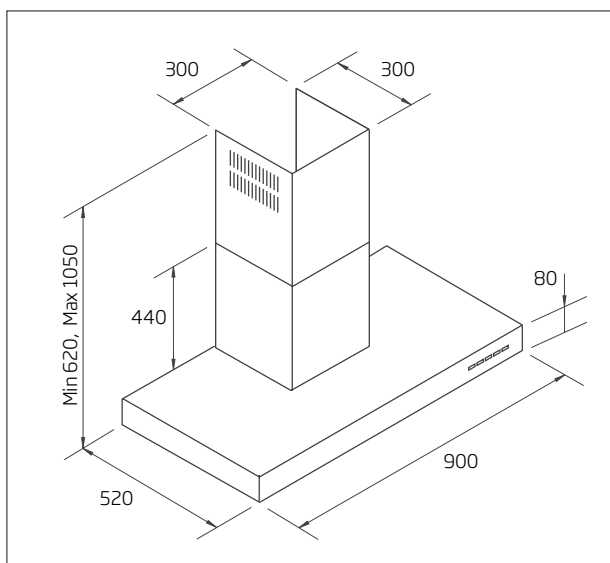

Note: Image for illustration purposes only.



Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel with glass finish silent Isodrive® motor system soft touch controls Perimeter Aspiration 4 x speed levels 15 minute delay timer with auto shut off 3 x halogen lights (optional LED) aluminium, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	WM-EX90S <ul style="list-style-type: none"> dimensions: (W x D) 900 x 520 mm 3 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall


>> DS3326-9S, DS3326B-9S rangehood/**WALL MOUNT**/



- **unique design** - available in stainless steel or black steel with black tempered glass fascia canopy, creates a bold, on-trend kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor with Perimeter Aspiration delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **Perimeter Aspiration** - as smoke and steam rises, it is directed to the outer edges of the canopy, before extracting it more evenly through the filter.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.



Note: Image for illustration purposes only.

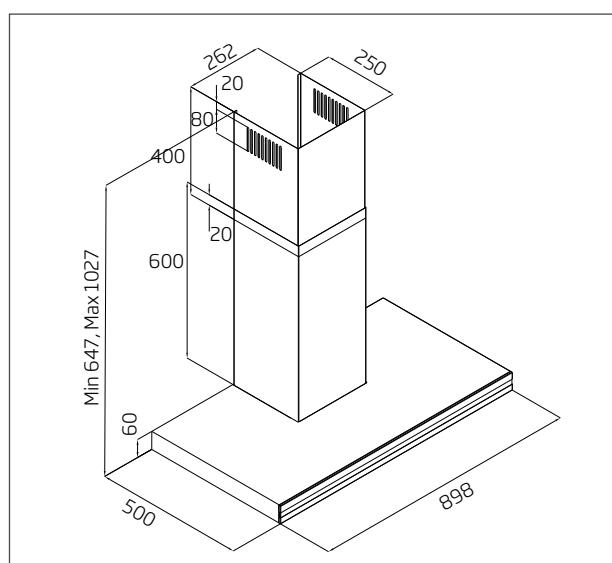

Description	Technical data	Motor options
<ul style="list-style-type: none"> • stainless steel finish • silent Isodrive® motor system • touch controls, digital display • remote control • Perimeter Aspiration • 5 x speed levels • 15 minute delay timer with auto shut off • 4 x LED lights • 1 x stainless steel, dishwasher safe filter • 10 Year Warranty on Isodrive® motor • 3 Year Warranty on canopy 	<p>DS3326B-9S</p> <ul style="list-style-type: none"> • black powder coated S/S, black glass • dimensions: (W x D) 898 x 500 mm <p>DS3326-9S</p> <ul style="list-style-type: none"> • stainless steel, black glass fascia • dimensions: (W x D) 898 x 500 mm 	<ul style="list-style-type: none"> • S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves • ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall • SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall




Island rangehoods

The perfect solution
over a kitchen island or
peninsula benchtop

» IS4110S rangehood/**ISLAND**/



- **innovative design** - square-edged European style stainless steel canopy, creates a bold, modern kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

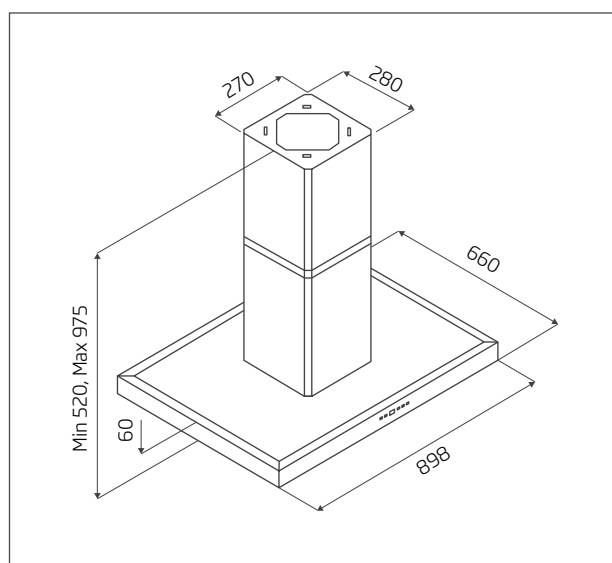


Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel finish silent Isodrive® motor system soft touch controls, digital display 5 x speed levels 15 minute delay timer with auto shut off 2 x halogen lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	IS4110S <ul style="list-style-type: none"> dimensions: (W x D) 898 x 660 mm 4 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

>> IS4160S rangehood/**ISLAND**/



- **classic design** - contemporary European stainless steel canopy with softer lines, creates a classic kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

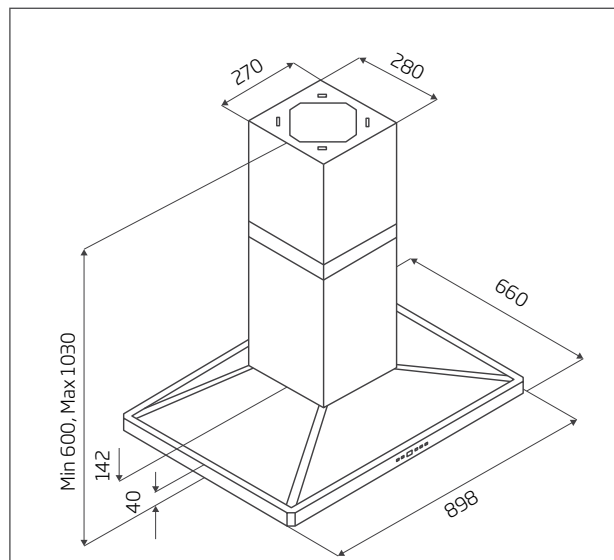


Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel finish silent Isodrive® motor system soft touch controls, digital display 5 x speed levels 15 minute delay timer with auto shut off 2 x halogen lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	IS4160S <ul style="list-style-type: none"> dimensions: (W x D) 898 x 660 mm 4 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

» IS4140S rangehood/**ISLAND**/



- **innovative design** - tempered glass curved "butterfly" and stainless steel canopy, over an island or peninsular counter top creates a light and modern kitchen style.
- **powerful silent extraction** - German engineered Isodrive® motor delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

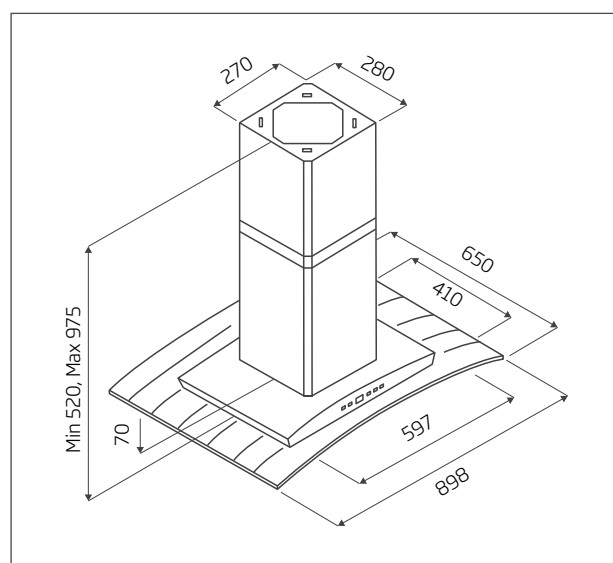

Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel & glass finish silent Isodrive® motor system soft touch controls, digital display 5 x speed levels 15 minute delay timer with auto shut off 2 x halogen lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	IS4140S <ul style="list-style-type: none"> dimensions: (W x D) 898 x 650 mm 2 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

Undermount rangehoods


A cooking extraction
solution that 'disappears'
into your cabinetry



» UM1170-6S, UM1170-9S rangehood/**UNDERMOUNT**/



- **concealed design** - stainless steel undermount rangehood integrates seamlessly with kitchen cabinetry, creates functional, built-in kitchen style.
- **powerful silent extraction** - externally mounted, German engineered Isodrive® delivers effective, efficient extraction of steam, smoke, and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.
- **mesh or baffle filters** - dishwasher safe

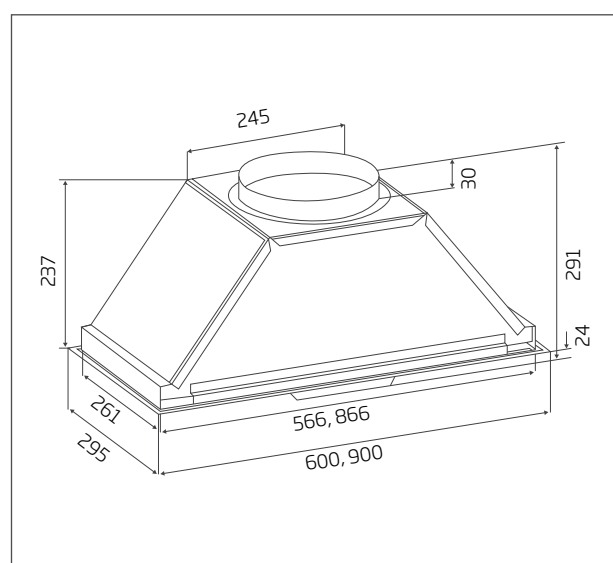

Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel finish silent Isodrive® motor system soft touch controls 5 x speed levels 15 minute delay timer with auto shut off 2 x LED lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	<p>UM1170-6S</p> <ul style="list-style-type: none"> dimensions: (W x D) 600 x 295 mm 2 x filters (baffle filter optional) <p>UM1170-9S</p> <ul style="list-style-type: none"> dimensions: (W x D) 900 x 295 mm 3 x filters (baffle filter optional) 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall


>> UM-PA9S rangehood/**UNDERMOUNT**/



- **concealed design** - stainless steel undermount rangehood integrates seamlessly with kitchen cabinetry, creates modern minimalist kitchen style.
- **powerful silent extraction** - Perimeter Aspiration filter with externally mounted, German engineered Isodrive® delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **Perimeter Aspiration** - as smoke and steam rises, it is directed to the outer edges of the canopy, before extracting it more evenly through the filter.



Pictured: Perimeter Aspiration image for illustration purposes only; electronic touch control operation panel.

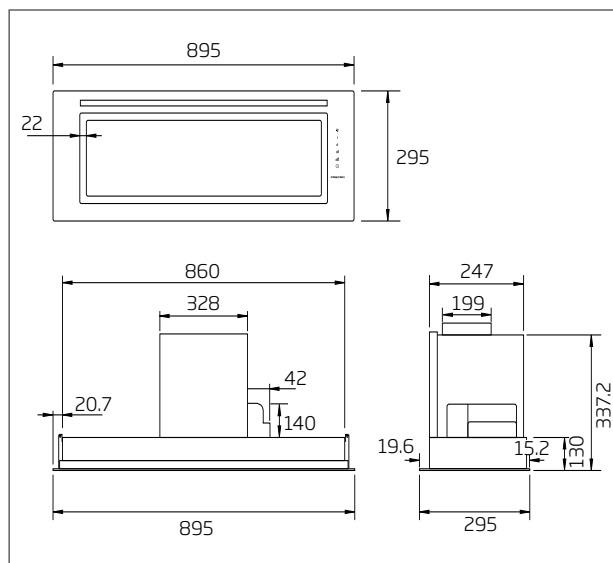

Air outlet Ø200




Description	Technical data	Motor options
<ul style="list-style-type: none"> • stainless steel finish • silent Isodrive® motor system • Perimeter Aspiration • soft touch controls • 4 x speed levels • 15 minute delay timer with auto shut off • strip LED illumination • aluminium, dishwasher safe filters • 10 Year Warranty on Isodrive® motor • 3 Year Warranty on canopy 	UM-PA9S <ul style="list-style-type: none"> • dimensions: (W x D) 895 x 295 mm • 1 x filter 	<ul style="list-style-type: none"> • S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves • ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall • SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

» UM-9S, UM-12UMS rangehood/**UNDERMOUNT**/



- **concealed design** - stainless steel undermount rangehood integrates seamlessly with kitchen cabinetry, creates commercial, integrated kitchen style.
- **powerful silent extraction** - externally mounted, German engineered Isodrive® delivers effective, efficient extraction of steam, smoke and odours, leaves kitchen air fresher.
- **convenient features** - soft-touch control with 5 level speeds, and a 15 minute delay timer with auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.
- **baffle filters** - dishwasher safe, commercial grade, lifetime warranty.

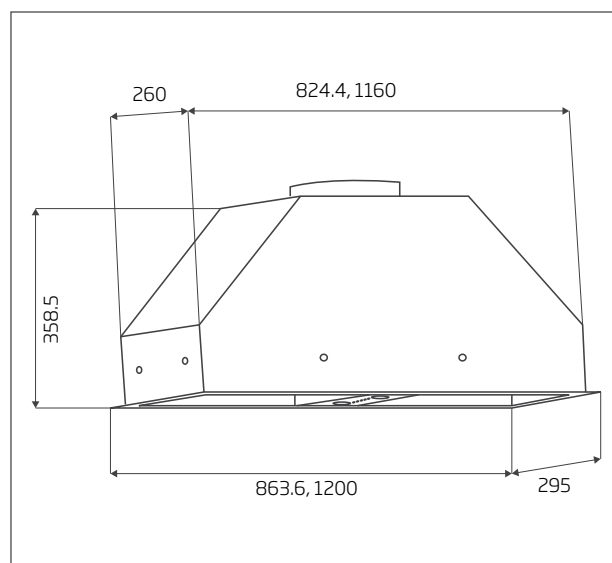

Description	Technical data	Motor options
<ul style="list-style-type: none"> stainless steel finish silent Isodrive® motor system electronic controls 5 x speed levels 15 minute delay timer with auto shut off 2 x LED lights stainless steel, dishwasher safe filters 10 Year Warranty on Isodrive® motor 3 Year Warranty on canopy 	<p>UM-9S</p> <ul style="list-style-type: none"> dimensions: (W x D) 863.6 x 295 mm 2 x filters <p>UM-12UMS*</p> <ul style="list-style-type: none"> dimensions: (W x D) 1200 x 295 mm 4 x filters 	<ul style="list-style-type: none"> S1 - single external motor, 650 m³/h airflow, 150mm flexi ducting (4m), install roof/wall/eaves ST - single external motor, 900 m³/h airflow, 200mm flexi ducting (6m), install roof/wall SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall

*Note: This model only available for SP 1600 Isodrive® motor.

Cassette Rangehoods


An innovative solution
over a kitchen island or
peninsula benchtop



» UM4220-12S, UM422G-12S rangehood/**CASSETTE**/



- **innovative solution** - this ceiling/bulkhead rangehood is ideal over island or peninsula kitchen bench, maintains uninterrupted eye-line, available in stainless steel or stainless steel and black glass, creates sleek, glamorous kitchen style.
- **powerful silent extraction** - externally mounted, German engineered Isodrive® delivers effective, efficient extraction of steam, smoke, and odours, leaves kitchen air fresher.
- **Perimeter Aspiration** - as smoke and steam rises, it is directed to the outer edges of the canopy, before extracting it more evenly through the filter.
- **convenient features** - remote control with 4 level speeds, and a 15 minute delay timer auto shut-off, so you can leave the kitchen after cooking and the rangehood will switch itself off after clearing the air.

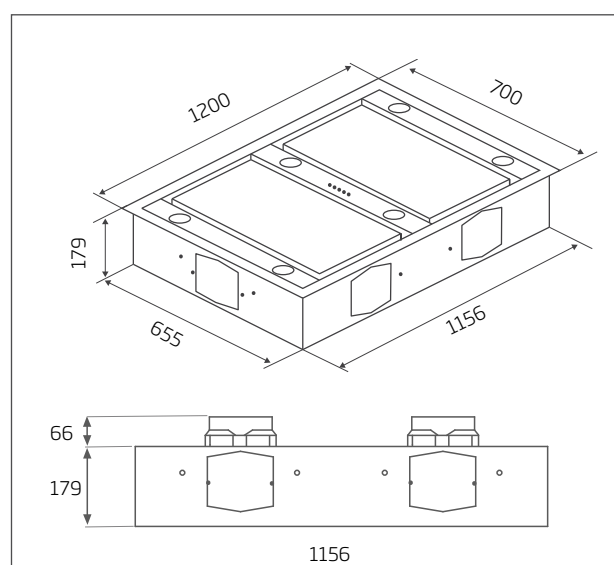

Pictures left-right:
UM4220-12S stainless steel;
UM422G-12S stainless steel & glass



Description	Technical data	Motor options
<ul style="list-style-type: none"> • black glass or stainless steel finish • ceiling/bulkhead cassette rangehood • silent Isodrive® motor system • Perimeter Aspiration • remote control operation* • 4 x speed levels • 15 minute delay timer with auto shut off • 6 x halogen lights • 2 x aluminium, dishwasher safe filters • 10 Year Warranty on Isodrive® motor • 3 Year Warranty on canopy 	UM4220-12S <ul style="list-style-type: none"> • stainless steel • dimensions: (W x D) 1200 x 700 mm 	<ul style="list-style-type: none"> • SP - single external motor, 1600 m³/h airflow, 200mm flexi ducting (6m), install roof/wall • SP2 - twin external motors, 3000 m³/h airflow, 200mm flexi ducting (2 x 6m), install roof/wall • SE - single external motor, 3200 m³/h airflow, 250mm flexi ducting (4m), install roof/wall
	UM422G-12S <ul style="list-style-type: none"> • stainless steel & glass • dimensions: (W x D) 1200 x 700 mm 	

***Note:** This model is controlled by remote control only. For a lasting quality finish in your kitchen, Schweigen recommends a water repellent paint type on walls and ceiling surrounding.

Bathroom Venting

The most powerful
solution on the market for
a fresher, more hygeinic
bathroom



Silent Exhaust System


>> BR500 exhaust system/**MULTI-PURPOSE**

The Multi-Purpose Exhaust System removes steam, odour and airborne bacteria with power and efficiency.

- Hygienically removes odours and airborne bacteria without the use of toxic chemicals.
- German engineered, Australian designed venting system.
- Australia's most powerful and energy efficient multi-purpose exhaust.
- Can be installed and vented to two rooms – with optional DVK500 kit (see diagram below).
- Easy to install by professional.
- Whisk away odours in seconds.
- Helps prevent bathroom mould.
- **5 Year Warranty**



Powerful extraction from two rooms

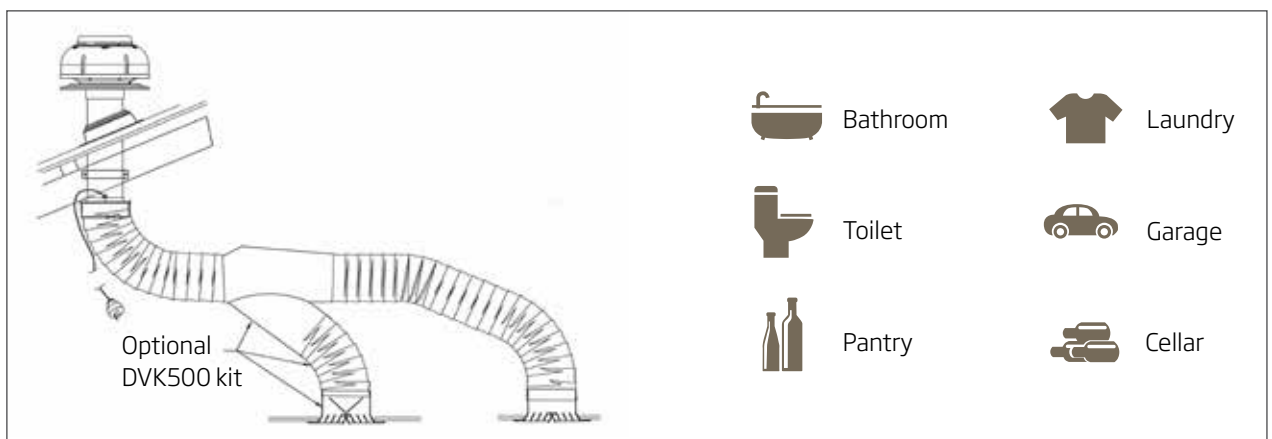

Installation Specifications, Parts & Accessories


Engage a Professional Qualified Installer

Schweigen motors have different mounting limitations due to weight and other factors. Not all motors can be mounted in the eaves for example, so make sure you check the motor manual and installation guide to ensure it meets your installation requirements. Checking with your builder or architect can also be helpful at the planning stage for a new kitchen renovation.

Installing a Schweigen silent rangehood system is a specialised task and requires a qualified, experienced professional. In order to operate correctly, the ducting must have an 's' bend, which requires skill if your home has a flat roof with no cavity. We strongly recommend that you use an installer from our network or a qualified professional trades person.


S1. Isodrive® 650 Single Motor

Weight: 2.9 kg without the PVC pipe.

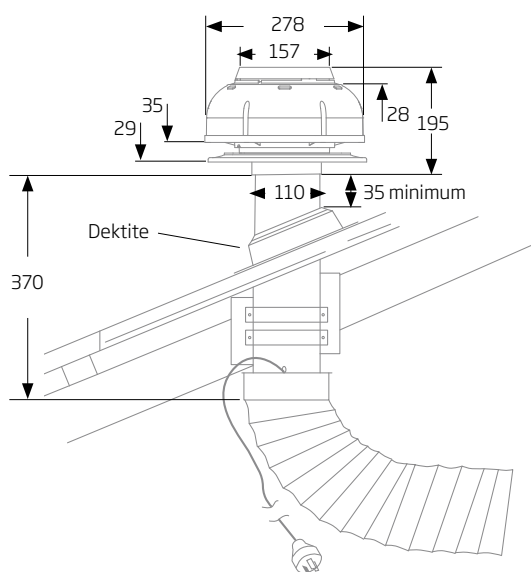


ST. Isodrive® 900 Single Motor

Weight: 2.7 kg without the PVC pipe.

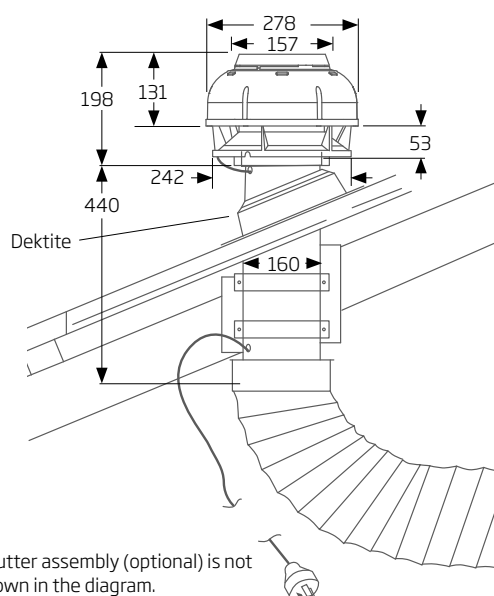

SP. Isodrive® 1600 Single Motor


Weight: 6.1 kg without the PVC pipe

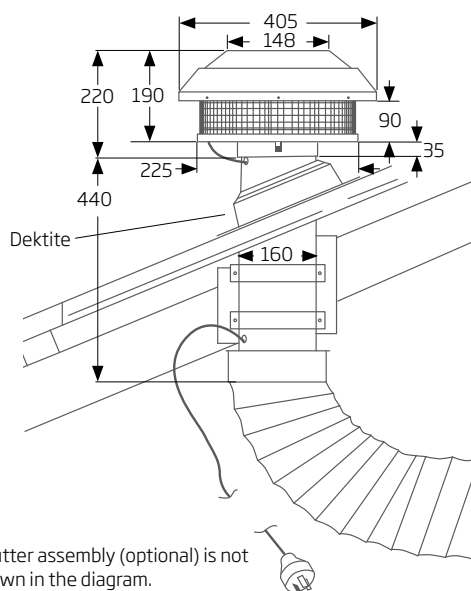

SP2. Isodrive® 1600 Twin Motor


Weight: 6.1 kg each without the PVC pipe

Note: Two motors included, may require a Y joint

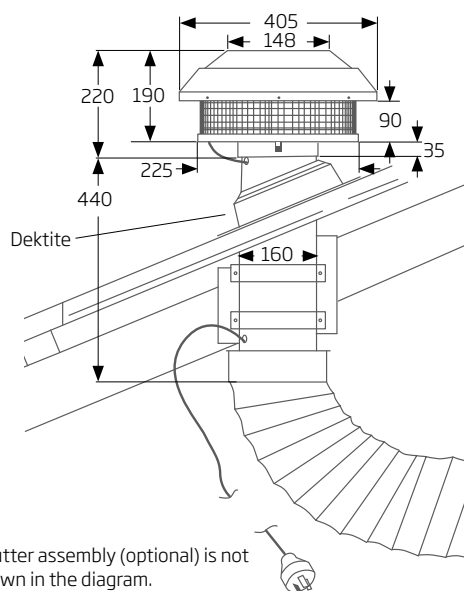


SE. Isodrive® 3200 Single Motor

Weight: 8.3 kg without the PVC pipe

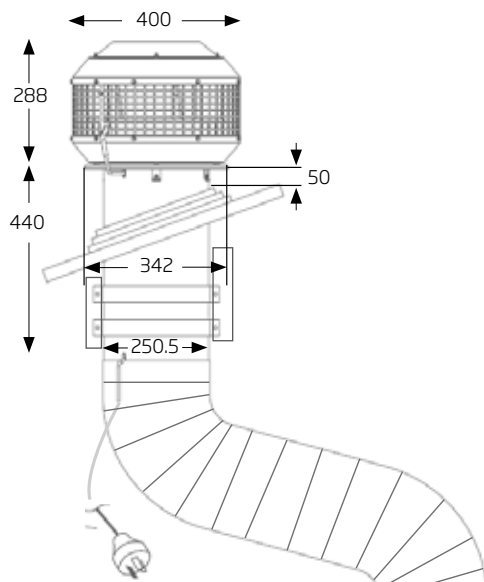


BR500 Single Motor

Weight: 2.9 kg without the PVC pipe

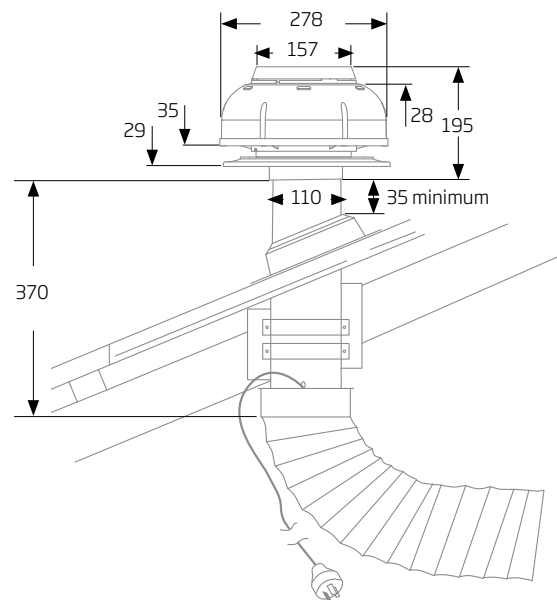


Optional accessories and parts

These are only available via the Schweigen Customer Service department.




Flexible ducting
Approx. 4m, 150mm

P1067




Flexible ducting
Approx. 6m, 200mm

P1070



In-line back draught
shutter for 150mm
ducting

150MMINLINEBDSBUILD



Back draught shutter fit
to bell mouth adaptor

150MMBDSBUILD




Weather guard with
bracket

ISO3200WGBUILDASS




Wall hanging bracket

P1107 (Isodrive® 1600 only)




Wall cover plate

P1108 (Isodrive® 900,
1600, 3000)
P2025 (Isodrive® 3200 only)




250-200mm reducer

P1070




Flat roof mount flange

P40113MF




Baffle filter

Note: Some noise may
occur due to baffle design
ergonomics.




200 x 150 x 150mm Y joint

200-150-150YJOINT



250 x 200 x 200mm Y joint

250-200-200YJOINT



Multi-fit Y joint

250/200x200/150x200/150YJOINT

Product Comparison

MODEL NUMBER	TYPE	AVAILABLE WIDTH	CANOPY DEPTH	MOTOR OPTIONS
DS3131S	Wall Mount	898mm	500mm	S1. 650 / ST. 900 / SP. 1600
WM3150-6S	Wall Mount	600mm	500mm	S1. 650 / ST. 900 / SP. 1600
WM3150S	Wall Mount	898mm	500mm	S1. 650 / ST. 900 / SP. 1600
DS3170S	Wall Mount	898mm	500mm	S1. 650 / ST. 900 / SP. 1600
DS3170-12S	Wall Mount	1200mm	500mm	SP. 1600
WM2190-6S	Wall Mount	600mm	500mm	S1. 650 / ST. 900 / SP. 1600
WM2190S	Wall Mount	898mm	500mm	S1. 650 / ST. 900 / SP. 1600
WM-EX90S	Wall Mount	900mm	520mm	S1. 650 / ST. 900 / SP. 1600
DS3326-9S	Wall Mount	898mm	500mm	S1. 650 / ST. 900 / SP. 1600
DS3326B-9S	Wall Mount	898mm	500mm	S1. 650 / ST. 900 / SP. 1600
IS4110S	Island	898mm	660mm	S1. 650 / ST. 900 / SP. 1600
IS4160S	Island	898mm	660mm	S1. 650 / ST. 900 / SP. 1600
IS4140S	Island	898mm	650mm	S1. 650 / ST. 900 / SP. 1600
UM1170-6S	Undermount	600mm	295mm	S1. 650 / ST. 900 / SP. 1600
UM1170-9S	Undermount	900mm	295mm	S1. 650 / ST. 900 / SP. 1600
UM-PA9S	Undermount	895mm	295mm	S1. 650 / ST. 900 / SP. 1600
UM-9S	Undermount	863.6mm	295mm	S1. 650 / ST. 900 / SP. 1600
UM-12UMS	Undermount	1200mm	295mm	SP. 1600
UM422G-12S	Cassette	1200mm	700mm	SP. 1600 / SP2. 3000 / SE. 3200
UM4220-12S	Cassette	1200mm	700mm	SP. 1600 / SP2. 3000 / SE. 3200

Additional Consumer Information

Under our policy of continuous product development, product specifications may change without notice. Prospective purchasers should therefore check with the retailer to ensure this publication correctly describes the products being offered for sale. All information supplied is to be used for general reference purposes only and is on the understanding that Schweigen Home Appliances will not be liable for any loss, liability or damage of whatever kind arising as a result of any reliance upon such information. Colours of products illustrated are as close as printing limitations allow. All images used in the brochure are for illustrative purposes only.

BAFFLE FILTER OPTIONAL	NO. FILTERS	LIGHTS	AUTO SHUT-OFF	FAN SPEED	MATERIAL / FINISH
Yes	Three	2 Halogen	Yes	5	Stainless Steel
Yes	One	2 Halogen	Yes	5	Stainless Steel & Glass
Yes	Two	2 Halogen	Yes	5	Stainless Steel & Glass
Yes	Three	2 Halogen	Yes	5	Stainless Steel
Yes	Four	3 Halogen	Yes	5	Stainless Steel
Yes	Two	2 Halogen	Yes	5	Stainless Steel
Yes	Three	2 Halogen	Yes	5	Stainless Steel
No	Three	3 Halogen / LED	Yes	4	Stainless Steel & Glass
No	One	4 LED	Yes	5	Stainless Steel & Glass
No	One	4 LED	Yes	5	Black Steel & Glass
Yes	Four	2 Halogen	Yes	5	Stainless Steel
Yes	Four	2 Halogen	Yes	5	Stainless Steel
Yes	Two	2 Halogen	Yes	5	Stainless Steel & Glass
Yes	Two	2 LED	Yes	5	Stainless Steel
Yes	Three	2 LED	Yes	5	Stainless Steel
No	One	1 Strip LED	Yes	4	Stainless Steel
Yes	Two	2 LED	Yes	5	Stainless Steel
Yes	Four	2 LED	Yes	5	Stainless Steel
No	Two	6 Halogen	Yes	4	Stainless Steel & Glass
No	Two	6 Halogen	Yes	4	Stainless Steel

Distributed by:



schweigen

address:	8/3-4 Anzed Court Mulgrave Victoria 3170 Australia
phone:	1300 881 693
fax:	1300 881 639
email:	sales@schweigen.com.au
web:	www.schweigen.com.au