

# RADIANTE 2000 STANDARD INSTALLATION

CHEMINEES PHILIPPE

A U S T R A L I A

[www.chemphilaust.com.au](http://www.chemphilaust.com.au)

## LEGEND


- Firebox Dimension  
 ▲ Exact Dimension  
 ■ Minimum Dimension  
 ➡ Air Intake  
 ⇨ Air Outlet
-  Brick Masonry

NOTES:

- [1] Air intake grilles minimum air flow area required = 180cm<sup>2</sup> each side.
- [2] Air outlet grilles minimum air flow area = 240cm<sup>2</sup> each side and 480cm<sup>2</sup> if one grille is used.
- [3] Hearth height dimension optional (refer separate specs for construction.)
- [4] All dimensions in millimetres.
- [5] Heater can be left freestanding.
- [6] Do not scale from these diagrams
- [7] Ducting mandatory for exempt units to comply to AS/NZ 4012/4013:2014





## FIREPLACE

## CONSTRUCTION STEP 1

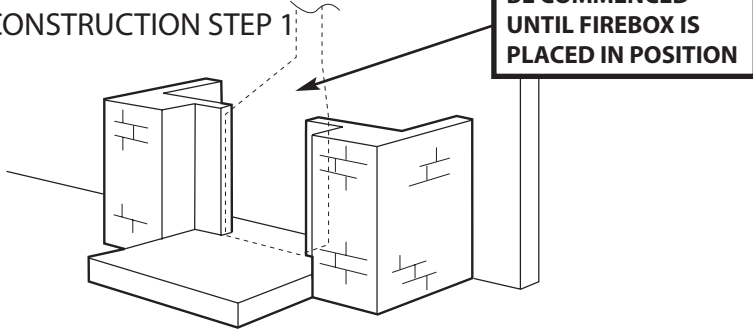

## FIREPLACE

## CONSTRUCTION STEP 2

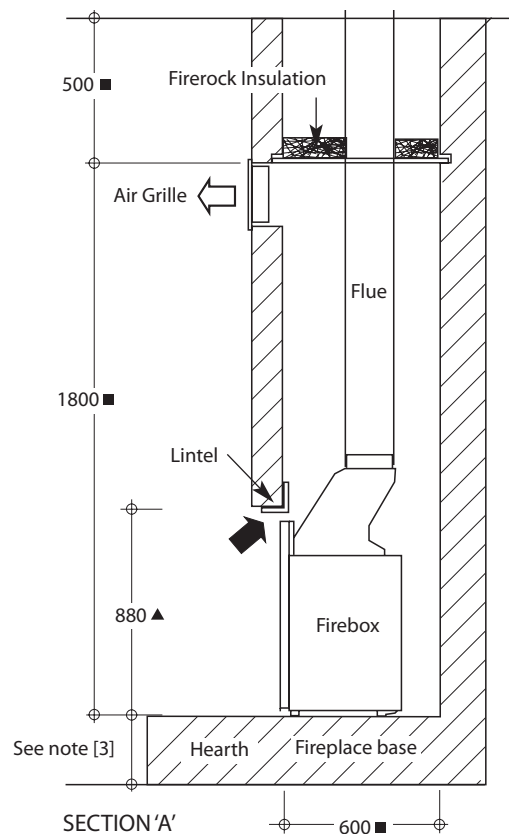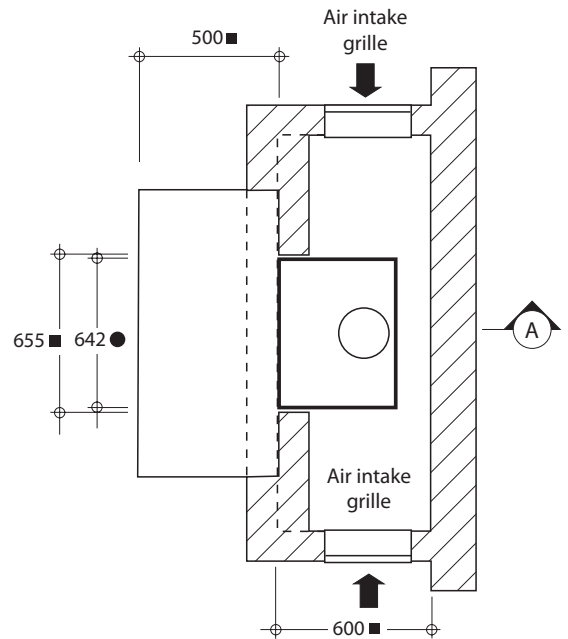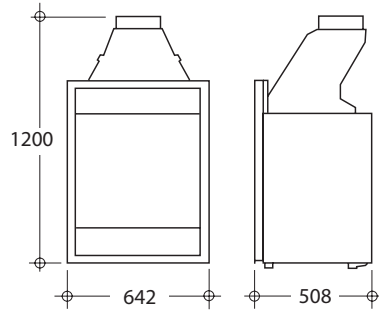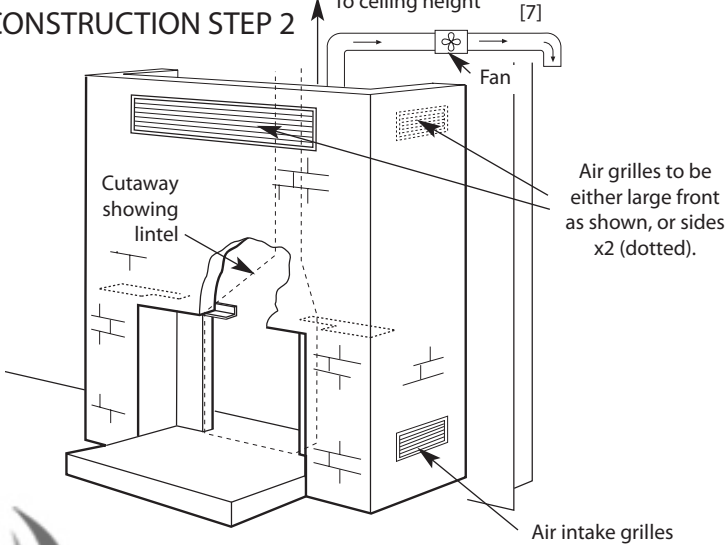

**wignells**  
of melbourne

since 1949

THE HOME OF QUALITY HEATING & COOKING SYSTEMS

430 Johnston St., Abbotsford, Victoria 3067 Phone: 03 9417 3315  
e-mail: [sales@wignells.com.au](mailto:sales@wignells.com.au) [www.wignells.com.au](http://www.wignells.com.au)

*Wignells of Melbourne's policy is one of continuous development. We reserve the right to change sizes and specifications without notice.*